

*D*

PATENT

jc551 U.S. PTO  
09/316164  
05/21/99

W&W File No.: 5102 P 006

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

Patent Application Of:	)	
Thomas A. Cohen and	)	Prior Application No.: 09/054,896
Robert J. Chatfield	)	Filed: April 3, 1998
	)	
Mailed: May 21, 1999	)	
	)	Application No.:
	)	Examiner: Not Assigned
For: Distributed Database System and	)	Art Unit: Not Assigned
Database Receiver Therefor	)	

**DIVISIONAL PATENT APPLICATION**  
**TRANSMITTAL FILING UNDER 37 C.F.R. §1.53(b)**

Box Patent Application  
Assistant Commissioner For Patents  
Washington, D.C. 20231

Dear Sir:

This is a request for filing a divisional application of pending prior Application Serial No. 09/054,896, under 37 C.F.R. § 1.53(b) which is a continuation of Application Serial No. 08/436,336, filed July 18, 1995, now issued as U.S. Patent No. 5,737,595. The parent application was filed on April 3, 1998, by Applicants Thomas A. Cohen and Robert J. Chatfield, and is similarly entitled "Distributed Database System and Database Receiver Therefor."

**Benefit of Prior U.S. Application**

The attached divisional application being transmitted claims the benefit of a prior U.S. application, as indicated below.

**Papers Enclosed**

In accordance with 37 C.F.R. § 1.63(d), the specification filed herewith contains no new matter. While it is a revised version of the specification as originally filed in the prior U.S. application, the only revision consists of the Related Applications section added to the first page of the specification. Accordingly, a copy of the executed Declaration from the parent application is submitted herewith.

jc649 U.S. PTO  
05/21/99

09/316164 05/21/99

Attorney Docket No. 5102 P 006

Title: Distributed Database System and Database Receiver Therefor

Inventors: Thomas A. Cohen and Robert J. Chatfield

Page 2

The papers attached are as follows:

- 51 pages of Specification;
- 12 pages of Claims;
- 1 page of Abstract; and
- 13 sheets of Informal Drawings containing Figures 1-10.

#### **Additional Papers Enclosed**

A Preliminary Amendment is also attached, requesting cancellation of claims 1-38, 40-47, amendment of claim 39 and addition of claims 48-81 before examination.

A copy of the Power of Attorney by the Assignee of the Entire Interest (Revocation of Prior Powers) filed in a prior U.S. Application is submitted herewith.

A copy of the original Assignment filed in a prior U.S. Application is submitted herewith.

A copy of the original Declaration of Small Entity Status is also submitted herewith.

#### **Declaration or oath (including power of attorney)**

As previously stated, a copy of the executed Declaration filed in a prior U.S. application is submitted herewith, in accordance with 37 C.F.R. §1.63(d).

#### **Inventorship Statement**

The inventorship for all the claims in this application are the same as that for the parent application.

Attorney Docket No. 5102 P 006

Title: Distributed Database System and Database Receiver Therefor

Inventors: Thomas A. Cohen and Robert J. Chatfield

Page 3

### Fee Calculation (37 C.F.R. § 1.16)

The filing fee has been calculated as shown below:

			Small Entity		or	Other Than A Small Entity	
For:	No. Filed	No. Extra	Rate	Fee		Rate	Fee
Basic Fee				\$380	or		\$760
Total Claims	35 - 20 =	15	x 9 =	\$135	or	x 18 =	\$0
Independent Claims	5 - 3 =	2	x 39 =	\$ 78	or	x 78 =	\$0
<input type="checkbox"/> First Presentation of Multiple Dependent Claim			x 130 =		or	x 260 =	\$
			Total	\$593	or	Total	\$0

X Check No. 018926 in the amount of \$593.00 is attached.

The Commissioner is hereby authorized to charge payment or credit any overpayment to Deposit Account No. 23-0280 for the following fees associated with this communication and during the entire pendency of the Application (a duplicate copy of this sheet is attached).

X Any additional filing fees under 37 C.F.R. § 1.16(a), (f) and (g).

X Any filing fees under 37 C.F.R. § 1.16(b), (c) and (d) for presentation of extra claims.

X Any patent application processing fees under 37 C.F.R. § 1.17.

### Relate Back--35 U.S.C. 120

As required under 35 U.S.C. 120, the Specification of the attached application includes the following specific reference to the earlier filed parent application:

"This Application is a divisional of co-pending U.S. Patent Application Serial No. 09/054,896 filed April 3, 1998, which is a continuation of U.S. Patent Application Serial No. 08/436,336 filed June 18, 1995, which issued on April 7, 1998 as U.S. Patent No. 5,737,595, which claims priority from PCT Application No. PCT/AU93/00604 filed Nov.26, 1993, which claims priority from Australian Patent Application No. PL 6080 filed Nov. 27, 1992, and from

Attorney Docket No. 5102 P 006

Title: Distributed Database System and Database Receiver Therefor

Inventors: Thomas A. Cohen and Robert J. Chatfield

Page 4

Australian Patent Application No. PM 0549, filed Aug. 13, 1993, and from Australian Patent Application No. PM 0742, filed Aug. 20, 1993, and from Australian Patent Application No. PM 1570, filed Sep. 30, 1993, and from Australian Patent Application No. PM 1571, filed Sep. 30, 1993, and from Australian Patent Application No. PM 1621 filed Oct. 1, 1993.


Upon the issuance of the parent application, Applicants will amend the specification to include the U.S. Patent No. of the parent.

Please address all future communications to:

Nelson D. Nolte, Reg. No. 42,938  
Wallenstein & Wagner, Ltd.  
311 South Wacker Drive, 53rd Floor  
Chicago, Illinois 60606-6622  
312.554.3300

Respectfully submitted,

Date: May 20, 1999


By:   
Nelson D. Nolte, Reg. No. 42,938  
Wallenstein & Wagner, Ltd.  
311 South Wacker Drive, 53rd Floor  
Chicago, Illinois 60606-6622  
312.554.3300  
Agent for Applicants

**CERTIFICATION UNDER 37 C.F.R. § 1.10**

Express Mail Label No. EL237759381US

Date of Deposit: May 21, 1999

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 C.F.R. § 1.10 on the date indicated above and is addressed to: Box Patent Application, Assistant Commissioner for Patents, Washington, D.C. 20231.

  
Renee Villalobos, Legal Assistant (74230)

Applicant or Patentee: Thomas Andrew Cohen and Robert Jeffries  
Chatfield

Serial or Patent No.: PCT/AU93/00607

Attorney's Docket No.: MAX-0001

Date Filed or Issued: 26 November 1993

For: DISTRIBUTED DATABASE SYSTEM AND DATABASE RECEIVER THEREFOR

**VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY STATUS  
(37 CFR 1.9(f) and 1.27(c) - SMALL BUSINESS CONCERN**

I hereby declare that I am:

( ) the owner of the small business concern identified below:

(XX) an official empowered to act on behalf of the concern  
identified below:

NAME OF CONCERN: Io RESEARCH PTY. LIMITED

ADDRESS OF CONCERN: Level 3, 30 Kings Park Road  
West Perth, Western Australia, 6005  
Australia

I hereby declare that the above-identified small business concern qualifies as a small business concern as defined in 13 CFR 121.12, and reproduced in 37 CFR 1.9(d), for purposes of paying reduced fees under section 41(a) and (b) of Title 35, United States Code, in that: (1) the number of employees of the concern, including those of its affiliates, does not exceed 500 persons; and (2) the concern has not assigned, granted, conveyed, or licensed, and is under no obligation under contract or law to assign, grant, convey, or license, any rights in the invention to any person who could not be classified as an independent inventor if that person had made the invention, or to any concern which would not qualify as a small business concern or a nonprofit organization under this section. For purposes of this statement, (1) the number of employees of the business concern is the average over the previous fiscal year of the concern of the persons employed on a full-time, part-time or temporary basis during each of the pay periods of the fiscal year, and (2) concerns are affiliates of each other when either, directly or indirectly, one concern controls or has the power to control the other, or a third party or parties controls or has the power to control both.

I hereby declare that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention entitled **DISTRIBUTED DATABASE SYSTEM AND DATABASE RECEIVER THEREFOR** by inventor(s) Thomas Andrew Cohen and Robert Jeffries Chatfield described in International Application serial no. PCT/AU93/00607, filed November 26, 1993.

If the rights held by the above-identified small business concern are not exclusive, each individual, concern or organization having rights in the invention is listed below\* and no rights to the invention are held by any person, other than the inventor, who would not qualify as an independent inventor under 37 CFR 1.9(c) if that person made the invention, or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d), or a nonprofit organization under 37 CFR 1.9(e).

\*NOTE: Separate verified statements are required for each named person, concern or organization having rights to the invention averring to their status as small entities. (37 CFR 1.27)

FULL NAME:

ADDRESS:

( ) INDIVIDUAL ( ) SMALL BUSINESS CONCERN ( ) NONPROFIT ORGANIZATION

FULL NAME:

ADDRESS:

( ) INDIVIDUAL ( ) SMALL BUSINESS CONCERN ( ) NONPROFIT ORGANIZATION

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

NAME OF PERSON SIGNING THOMAS ANAKELI (CHEN)  
TITLE OF PERSON SIGNING DIRECTOR  
ADDRESS OF PERSON SIGNING 25 MANTON STREET, COOTESBURY  
WESTERN AUSTRALIA

Thomas Chen  
SIGNATURE

12.6.95  
DATE

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

Patent Application Of:	)	
Thomas A. Cohen and	)	Prior Application No.: 09/054,896
Robert J. Chatfield	)	Filed: April 3, 1998
	)	
Mailed: May 21, 1999	)	
	)	Application No.:
	)	Examiner: Not Assigned
For: Distributed Database System and	)	Art Unit: Not Assigned
Database Receiver Therefor	)	

**PRELIMINARY AMENDMENT**

Dear Sir:

Before examination, please amend the Application as follows.

**In the Specification:**

Please delete the Abstract and substitute therefor:

“A method for broadcasting data to a television set using a carrier signal such as a television or commercial radio carrier signal composed of the steps of: constructing a data stream from individual first record of a transmission database, each first record comprising one of a selection of formats, at least one of the first records comprising executable program code or an object, broadcasting the data stream within the carrier signal, providing a user with a user's device for receiving and decoding the data stream, the user's device receiving and decoding the data stream to a user's database, the user's database having second records comprising at least some of the first records, the second records comprising one of a selection of formats and at least one record comprising executable program code or an object broadcast from the first records determining the format a second record using a control program running, when required, the executable program code, and generating a display on the television consistent with the format determined by the control program.”

**In the Claims:**

Please cancel claims 1-38 and 39-47.

Please amend claim 39 as follows:

39. In a method for broadcasting data to a television set using a carrier signal such as a television or commercial radio carrier signal, the improvement comprising:

5     constructing a data stream from individual first record of a transmission database, each first record comprising one of a selection of formats, at least one of the first records comprising executable program code or an object;

broadcasting the data stream within the carrier signal;

10     providing a user with a user's device for receiving and decoding the data stream, the user's device receiving and decoding the data stream to a user's database, the user's database having second records comprising at least some of the first records, the second records comprising one of a selection of formats and at least one record comprising executable program code or an object broadcast from the first records;

15     determining the format a second record using a control program;

running, when required, the executable program code; and

generating a display on the television consistent with the format determined by the control program.

      [A distributed database system comprising:

      a central station for accumulating and distributing data on a database, said central station comprising:

          a data store for storing accumulated data from said database, ready for distribution;

          processing means for extracting said data from said data store and generating a sequential data stream therewith for distribution;

          and transmission means for encoding and transmitting said sequential data stream;

      and a plurality of receiver stations for receiving said data and



selectively making available at least portions of said data in accordance with the demands of a user of a said receiver station, each of said receiver stations comprises:

decoder means to receive and decode transmitted data so as to reconstitute said database data therefrom;

input means for the user of said receiver station to input user commands in respect of the demands of the user to said receiver station;

receiver processing means for constituting a database from said data having regard to said user commands;

memory means for storing data for constituting said database; and

means for communicating selected data in direct response to said user commands;

wherein said decoder means includes:

data acquisition means for extracting a serial data stream and a synchronization signal from the transmitted data;

a data decoder to filter out data control information from said serial data stream and reconstitute said database data; and

transfer means to continuously transfer a stream of reconstituted data to said receiver processing means, and

wherein said receiver processing means includes:

further decoder means to examine said stream of reconstituted data and extract index data therefrom;

and database handling means to determine storage of individual database data in accordance with a prescribed algorithm,

whereby in response to a decision to store or update said individual database data, said database handling means is adapted to transfer said individual database data to a requisite storage location in said memory means and perform contingency action according to said prescribed algorithm involving changing the structure of said database so as to continuously constitute said database.]

Please add new claims 48-81, below.

48. The method of claim 39, wherein at least one first record comprises stream data and the display on the television comprises an audio presentation.

49. The method of claim 39, wherein at least one first record comprises index data and the display on the television comprises menus based on the index data.

50. The method of claim 39, further comprising the steps of supplying the user's database with requested records, the requested records being the result of a return link established between a microprocessor which operates with the user's database and the transmission database, the return link  
5 established at least in part via a telephonic network.

51. The method of claim 50, wherein a second data stream is received over the return link.

52. The method of claim 39, wherein the data stream comprises one or more data objects represented by information encoded in a first object and packet based protocol.

53. The method of claim 52, wherein the information is broadcast in a second packet based protocol.

54. In a method for broadcasting data to a television set using a carrier signal such as a television or commercial radio carrier signal, the improvement comprising:

- constructing a data stream from the records of a transmission database;
- 5 and
- the database having individual first records, each first record comprising one of a selection of formats, at least one of the first records comprising executable program code or an object; broadcasting the data stream within the carrier signal.

55. The method of claim 54, wherein at least one first record comprises stream data and the display on the television comprise an audio presentation.

56. The method of claim 54, wherein at least one first record comprises index data and the display on the television comprises menus based on the index data.

57. The method of claim 54, further comprising the step of supplying a user's database with requested records, the requested records being the result of a return link established between a microprocessor which operates
- 5 with the user's database and the transmission database, the return link established at least in part via a telephonic network.

58. The method of claim 57, wherein a second data stream is received over the return link.

59. The method of claim 54, wherein the data stream comprises one or more data objects represented by information encoded in a first object and packet based protocol.

60. The method of claim 59, wherein: the information is broadcast in a second packet based protocol.

61. In a method for receiving data for a television display using a carrier signal such as a television or commercial radio carrier signal, the improvement comprising:

- 5 receiving a carrier signal and from it decoding a data stream to a user's database, the user's database comprising individual records comprising records recovered from the data stream, the individual records comprising one of a selection of formats and at least one record comprising executable program code or an object broadcast from the first records;
- 10 determining the format an individual record using a control program; running, when required, the executable program code; and generating a display on the television consistent with the format determined by the control program.

62. The method of claim 61, wherein the data stream further comprises stream data and the display on the television comprises an audio presentation.

63. The method of claim 61, wherein at least one first record comprises index data and the display on the television comprises menus based on the index data.

64. The method of claim 61, further comprising the step of supplying the user's database with requested records, the requested records being the result of a return link established between a microprocessor which operates with the user's database and a transmission database, the return link
- 5 established at least in part via a telephonic network.

65. The method of claim 64, wherein a second data stream is received over the return link.

66. The method of claim 61, wherein the data stream comprises one or more data objects represented by information encoded in a first object and packet based protocol.

67. The method of claim 66, wherein the information is broadcast in a second packet based protocol.

68. In a communications device such as a personal computer or television or set top box adapted to receive a data stream broadcast over a carrier signal, such as a television or radio carrier signal, the improvement comprising:

- 5       a receiver for receiving broadcast database records;
- a decoder and processor for extracting individual data records from the data stream to a user's database, the user's database comprising individual user records comprising at least some records recovered from the broadcast database records;
- 10       the user records recovered from the broadcast database records comprising one of a selection of formats and at least one record comprising executable program code or an object broadcast from the first records;
- a control program for determining the format a user record;
- a processor for running, when required, the executable program code;
- 15    and
- a display generator for creating a display consistent with the format determined by the control program.

69. The device of claim 68, wherein the data stream further comprises stream data and the display comprises an audio presentation.

70. The device of claim 68, wherein at least one user record comprises index data broadcast in the broadcast database data and the display comprises menus based on the index data.

71. The device of claim 68, further comprising a return link for sending commands to supply the user's database with requested records, the return link established between a microprocessor which operates with the user's database and a transmission database, the return link established at least in part via a telephonic network.

72. The device of claim 71, wherein a second data stream is received over the return link.

73. The device of claim 68, wherein the data stream comprises one or more data objects represented by information encoded in a first object and packet based protocol.

74. The device of claim 73, wherein the information is broadcast in the data stream in a second packet based protocol.

75. In a device for broadcasting a carrier signal such as a television or commercial radio carrier signal to a user, the improvement comprising:

- 5 a computer having a transmission database;
- the database having individual first records, each first record comprising one of a selection of formats, at least one of the first records comprising executable program code or an object;
- an encoder for creating a packet based data stream constructed at least in part from the first records;
- 10 an inserter for inserting the data stream into another signal and a transmitter for broadcasting the data stream.

76. The device of claim 75, wherein at least one first record comprises stream data and the display comprises an audio presentation.

77. The device of claim 75, wherein at least one first record comprises index data used for displaying to the user menus based on the index data.

78. The device of claim 75, further comprising a return link for accepting user requested records, the link established between a microprocessor operated by the user and the transmission database, the return link established at least in part via a telephonic network.

79. The device of claim 78, wherein a second data stream is received over the return link.

80. The device of claim 75, wherein the data stream comprises one or more data objects represented by information encoded in a first object and packet based protocol.

81. The device of claim 80, wherein the information is broadcast in a second packet based protocol.

DISTRIBUTED DATABASE SYSTEM AND DATABASE RECEIVER THEREFOR  
TECHNICAL FIELD

This invention relates to a distributed database system and database receiver therefor, which has particular, but not exclusive, applicability to data broadcasting or datacasting communications media.

BACKGROUND ART

The closest system known to the applicant is a system often referred to as "teletext". The teletext system utilises the vertical blanking interval (VBI) of a television transmission for the purposes of broadcasting predetermined blocks of text material. The blocks of text are organised as pages where each page provides one screen of text material. The text format for each page is fixed as are the total number of pages of text material. The pages are broadcast repeatedly consecutively. Noted defects of this kind of system include the rigidity of the text in its page format and also the significant delays that can be encountered whilst a user waits for a requested page to come around to its time for re-transmission.

DISCLOSURE OF INVENTION

It is an object of the present invention to provide a system by which a database can be distributed from a central station with thematically linked data to one or more users at remote locations and where the user can autonomously group the received data for interpretation according to the demands of the user in an efficient and fast manner compared with prior art systems.



channel capacities.

Throughout this specification the term "data" is to be interpreted broadly to include all forms of information, whether it is to be output to the user as text, graphics, video, audio and whether the data is for the purposes of presentation to the user or whether the data has a functional purpose or computational purpose eg. forms part of a system header, a system programme component or the like.

Similarly, the term "database" is to be interpreted broadly as a general source and/or repository, however accessible, of data as defined in its broadest form above.

In accordance with one broad aspect of the present invention, there is provided a distributed database system comprising:-

a central station for accumulating and distributing data on a database, and

a plurality of receiver stations for receiving said data and selectively making available at least portions of said data in accordance with the demands of a user of a said receiver station;

wherein said central station comprises: a data store for storing accumulated data from said database for constituting a database, ready for distribution; processing means for extracting said data from said data store and generating a sequential data stream therewith for distribution; and transmission means for encoding and transmitting said sequential data stream; and

-3-

a said receiver station comprises: decoder means to receive and decode transmitted data so as to reconstitute said data therefrom; input means for a user of said receiver station to input user commands in respect of the demands of the user to said receiver station; receiver processing means for constituting a database from said data having regard to said user commands; memory means for storing data for constituting said database; and means for communicating selected data in direct response to said user commands.

In accordance with another aspect of the present invention, there is provided a database receiver for a distributed database system of the type defined in the preceding aspect of the invention comprising:-

decoder means to receive and decode data transmitted to the database receiver to reconstitute database data therefrom;

input means for receiving and processing user commands input by a user of said database receiver in respect of the demands of the user;

receiver processing means for constituting a database from said data having regard to said user commands.

memory means for storing data for constituting said database; and

means for communicating selected data from said constituted database in direct response to said user commands.

In accordance with another aspect of the invention.

-4-

there is provided a method for providing a distributed database for access and searching by a user comprising:-

accumulating and distributing data from the database to a plurality of users;

5 receiving and analysing the data in accordance with the demands of the user for selective storage of the data;

searching the stored data in response to a user command having regard to the demands of the user; and

10 communicating selected stored data conforming to the demands of the user, to the user.

In accordance with a further aspect of the invention, there is provided a method for receiving distributed database data and selectively communicating the same to a user comprising:-

15 receiving and decoding distributed data to reconstitute database data therefrom:

receiving and processing user commands representative of the demands of a user;

20 constituting a database from the database data having regard to the user commands;

storing selected database data for the constituted database; and

25 communicating selected database data from the constituted database in direct response to the user commands to the user.

In a further broad form of the invention, there is provided a distributed database system comprising a primary

database which is in communication via communication means with a plurality of remote subscriber stations; each remote subscriber station including storage means adapted to store at least a selected portion of said primary database, each  
5 said station further including data processing means adapted to process information stored in said storage means.

In a further broad form of the invention there is provided a distributed database system comprising at least  
10 a primary database in communication via communication means with a plurality of remote receiver stations; each remote receiver station including storage means adapted to store at least a selected portion of said primary database, each  
15 said receiver station further including data processing means adapted to process information stored in said storage means.

In a preferred form said system further includes input means for a user of a said receiver station and wherein said data processing means processes information contained  
20 in data sent from said at least primary database and also processes information received from said input means in order to determine which portions of said data and in what manner said portions of said data are to be presented to said user by said receiver station.

25 In a further broad form of the invention there is provided a remote receiver station for use with the distributed database system, said receiver station further including input means for a user and wherein said data

processing means processes the information contained in data received from one or more sources of data and also processed information received from said input means in order to determine which portions of said data and in what manner said portions of said data are to be presented to said user by said receiver station

#### BRIEF DESCRIPTION OF DRAWINGS

Embodiments of the invention will now be described with reference to the accompanying drawings wherein:-

Fig. 1 is a schematic block diagram of a distributed database system according to a first embodiment of the invention;

Fig. 2 is a schematic block diagram of the hardware comprising the database receiver disposed at a receiver station of Fig. 1;

Figs. 3a, 3b

3c are flowcharts showing the method of operation of the database receiver of Fig. 2 in accordance with appropriate operating software programmed into the receiver processor, where

Fig. 3a is a flowchart showing the method of operation of the decoder means;

Fig. 3b is a flowchart showing the method of operation of the receiver processing means: and

Fig. 3c is a flowchart showing the method of operation of the input means and the means

-7-

for communicating selected database data;

Fig. 4 is a block diagram of a further example of the system of Fig. 1 including a modem return link interface to a TV multimedia display processor,

Fig. 5 is a flow chart of the operation of the modem return link of Fig. 4,

Fig. 6 is a block diagram of a further example of the system of Fig. 1 incorporating a cordless telephone handset,

Fig. 7 is a concept diagram for a system according to the invention incorporating a return link and more than one source of input data for the receiver stations.

Fig. 8 is a block system diagram of a detailed implementation of the system of Fig. 7.

Figs 9A-9G comprise schematic block diagrams of an object oriented packet structure for transmission of data adapted for use in conjunction with any one of the examples of the distributed database system of the invention, and

Fig. 10 is an electrical schematic diagram of the receiver of Fig. 8.

#### DESCRIPTION OF PREFERRED EMBODIMENTS

The distributed database system of Fig. 1 is directed towards a distributed database system in the form of a datacast network and includes a plurality of database

receivers which form part of the network.

As shown in Fig. 1 of the drawings, the distributed database system 10 comprises a central station 11 for accumulating and distributing data for a database, the central station being for example a television broadcast station, and a plurality of receiver stations 13, which are specially adapted to include a database receiver for receiving the broadcast data from the central station 11 and selectively communicating the data in a database format to a user located at the receiver station in accordance with the demands of the user.

The datacast network utilises television signals to convey digital information for text display at the receiver stations. In this respect, the central station 11 generates a stream of data which is encoded into datacast packets as defined by the World Standard Teletext specification and known as Packet 31 data. This data stream is inserted into the vertical blanking interval (VBI) of the television broadcast signal transmitted from the central station 11 and is subsequently broadcast over the ether to be received by the receiver stations 13 at which are located display screens 15, such as television receiver sets or video monitors on which selected groups of received information can be displayed, and remote user interface devices 16, such as keypad controllers or the like.

The central station 11 for the purposes of datacasting generally comprises a data store in the form of a computer file server 17 which is adapted to accumulate and store

data in the form of digital records to form the database.

The file server 17 is connected to a processing means in the form of a data broadcast inserter. The inserter 19 is adapted to extract digital records in the form of database data from the file server 17 and generate a sequential data stream from this database data for distribution to the receiver stations. Importantly, the inserter is adapted to insert this data stream into the VBI of the broadcast television signal. This combined signal is passed on to a transmission means 21 which includes appropriate modulation and transmission circuitry for encoding and transmitting the sequential data stream via an antenna 23 in accordance with conventional broadcasting practice.

In conceptual terms, the database receiver at a receiver station 13 generally comprises decoder means 25, receiver processing means 27, memory means 29, input means 31 and means for communicating selected database data 33.

The decoder means 25 is connected to an input system 35 such as a TV tuner which is connected to a receiving antenna 37 for the purposes of receiving transmitted data broadcast from the central station 11. The decoder means is particularly designed to decode the transmitted data so as to reconstitute the database from the transmitted data.

The receiver processing means 27 is designed to constitute a database from reconstituted database data and store the same within an appropriate memory location of the memory means 29.



-10-

The input means 31 is associated with the remote control receiver interface 16 which is provided with a keypad for issuing user commands and database search parameters to the input means 31 when operated by the user.

5 The remote control interface 16 uses an infrared communication link with the input means 31 in accordance with conventional design practice for interfaces of this kind.

10 The input means 31 is adapted to access and extract selected communicable data stored within the memory means 29 for storage within another location of the memory means 29 in direct response to the user commands.

15 The means 33 for communicating is designed to simply display the communicable data stored within the other location of the memory means 29 on the display screen 15, which is directly connected thereto pursuant to the user commands.

20 An important consideration in this embodiment with respect to the database data which is broadcast from the central station 11 to the receiver stations 13 is that no assumptions are made about the nature of the information that is to be distributed, except that an individual element of the data may have some relationship to other data elements which is perceivable to the user.

25 Consequently, this property of the data may allow it to be dynamically grouped in relationships which are perceived by the user and hence can be acted upon by the issuance of a search command by the user at the receiver station.

Importantly, the groupings are not fixed in advance at the central station, but rather are determined by user choice and operation of the remote control interface 116 at the receiver station end. Thus, it is at the database receiver  
5 end that the database is constituted in response to the user demands, whereby the database receiver is adapted to receive, maintain, store and calculate the relationships between database data broadcast to it from the central station.

10 Each logical element of information which is broadcast is called a data entry and may consist of any number of characters. These characters are delivered by the user data portion of a datacast packet as defined by the World Standard Teletext specification.

15 Now more particularly describing the components of the database receiver, reference is made to Fig. 2 of the drawings.

As shown, the transmitted data signal as represented by the arrow 39 is received by the antenna 37 and applied to  
20 the input system 35 from which the video signal carrying the database data is passed to a data acquisition means in the form of a video input processor 41 forming part of the decoder means 25. The video input processor 41 is of conventional design for extracting a serial data stream  
25 from the video signal, as defined in the World Standard Teletext specification, and to reconstruct a Teletext clock which is as a synchronising signal used for further processing of the serial data stream. The serial data

-12-

stream and Teletext clock signals are passed via appropriate bus lines 43 to a "packet 31" data broadcast decoder 45 which also forms part of the decoder means 25. The packet decoder 45 is again of conventional design to conform to the World Standard Teletext specification and is adapted to accept the data stream and Teletext clock signals and perform a low level translation of the serial data stream into byte wide data which in turn is passed into a buffer comprising a first in first out (FIFO) memory 47 via a high speed bidirectional data bus 49.

The packet decoder 45 is constructed from a variety of embedded processors using very large-scale integrated (VLSI) circuits, gate arrays and other processor technologies.

The FIFO memory 47 is required to provide a continuous output data stream of database data from the sporadic input data stream which comprises bursts of packets of data decoded from the VBI of the transmitted data signal. The packets of data consist of characters that represent database data and other special data broadcasting information. The special data broadcasting information includes framing codes, data channel groups and cyclic redundancy checksums. Accordingly, it is only the database data which is used for the purposes of constituting the database and which is further processed by the database receiver. the other special data broadcast information being provided to enable correct processing of the database data in accordance with standard data communications.

-13-

A central processing unit 51 is connected to the packet decoder 45 via a high bandwidth bus. The CPU 51 provides the principle computing element of the database receiver and thus forms part of the decoder means 25, receiver processing means 27, input means 31 and the means 33 for communicating.

The CPU 51 interacts with the memory means 29 as part of its operations as the receiver processing means 27, input means 31 and the means 33 for communicating. The memory means 29 is divided into two memories, one being a large database memory 55 which is connected to the CPU 51 via a high speed bus 57 and the other is a communication memory 59 which is also connected to the CPU 51 by a discrete high speed bus 61.

Operation of the CPU 51 forms part of the decoder means 25 by including the construction of a data stream which is restricted to reconstituting database data only. The CPU 51 continuously reads database data from the FIFO memory 47 when data is available in the FIFO and makes that data available for further processing by the receiver processing means 27 by transfer means.

The database data which is processed by the CPU 51 in its operation as the receiver processing means 27 is actually divided into displayable records of the constituted database and index data relating these records. The database memory 55 is used to store a prescribed number of the displayable records and the associated index data thereof in a separate table which is used for searching and

retrieving the displayable records.

In its operation as the receiver processing means 27, the CPU 51 includes a number of software programmes which perform discrete processes in respect of the stream of reconstituted database data received from the transfer means. Moreover, the receiver processing means includes further decoder means to examine the stream of reconstituted database data and to extract index data therefrom, and database handling means to determine the storage of individual database data in accordance with the prescribed algorithm. This algorithm generally involves the database handling means to store individual data entries of database data at a requisite storage location in the database memory 55 so as to constitute a database and to perform prescribed contingency action involving changing the structure of the database continuously in response to new incoming database data having regard to the user demands. The operation of the receiver processing means 27 will be described in more detail later.

In its operation as part of the input means 31, the CPU 51 provides the processing for the input means 31 in relation to the searching and retrieving of the displayable records stored within the database memory 55 by the receiver processing means 27. These processing functions are performed in accordance with a software programme and will be described later.

The input means 31 includes appropriate interface decoding circuitry (not shown) for receiving user commands

signals input thereto by the remote control interface 16, which is connected to the CPU 51 for direct processing in accordance with the aforementioned software programme.

The means 33 for communicating selected database data of the database constituted by the receiver processing means 27 includes a character generating means 63 to generate characters for displaying on the display screen 15 in respect of the displayable record stored in the communication memory 59. Accordingly, the communication memory 59 stores selected displayable data records retrieved from the database memory 55 in accordance with the user commands input by the user under the operation of the input means 31. This memory mirrors the information which is displayed on the display screen 15, whereby the data stored therein under operation of the CPU 51 is read by the character generating means 63 in accordance with the control signals input thereto via bus line 65 from the CPU 51. The character generating means 63 is of conventional design being used to produce the actual character display signals for the display screen 15.

As indicated above the operation of the database receiver is determined by the software programmed into the CPU 51 which now will be described generally with reference to the flowcharts shown in Fig. 3 of the drawings.

The operation of the database receiver is divided into three main areas. The first of these is to operate the decoder means 256 to receive and process information broadcast to it from the central station 11. The second of

these is to operate the receiver processing means 27 to control the storage of this information to constitute a database within the database receiver. The third of these is to operate the input means 31 to enable the extraction of information from this database for the purposes of communication by means of visual display in accordance with the direct demands of the user and to operate the means 33 for communicating the selected records from the database. These three main functional areas all operate concurrently and continuously with each other to provide for optimum efficiency and speed from the user viewpoint.

With respect to the first area, reference is made to Fig. 3a of the drawings which shows the order in which the data reception functions occur.

When processing is commenced several memories need to be initialised and data paths set up to allow the reception of data. Accordingly, as represented at block 67, the software initialises the FIFO memory 47, the parameters of the database memory 55 and communication or screen memory 59 and the video extraction circuits of the video input processor 41.

Once the memories are set up, an embedded loop for the acquisition of data is entered as represented by block 69 for receiving the "packet 31" packets of data from the video input processor 41. This loop also recombines the "packet 31" data as represented by block 71 into a stream of database data from which the special data broadcast information is filtered out for processing by the receiver.

-17-

processing means 27. This stream of database data is then passed onto the second area of operation, as represented by block 73.

With respect to the second area, reference is made to Fig. 3b of the drawings which shows the order in which the further decoding and data handling functions occur. The receiver processing means 27 receives the serial database data resulting from the data reception process and processes this data to constitute the database. Moreover, the resultant stream of database data is examined so that the displayable records and the index data are separately extracted as represented at block 75.

The storage of extracted individual database data is then determined in accordance with the prescribed algorithm since the database memory, although large, is limited in size and hence cannot store every displayable record which is broadcast and received by the database receiver. Thus, the algorithm is required to calculate which records that have already been stored within the database memory 55 can be deleted and overwritten by new database data. The main parameter of the algorithm for determining the replacement of database data is the particular thematic link of the displayable record of the database data entry to a set of database search parameters which have been input with the user commands by a user using the remote control interface 16.

As represented by block 77, the algorithm proceeds with the database handling means determining whether there is



-18-

any free space available in the database memory 55 for storing displayable records and the index data thereof. If space is available, then the individually extracted displayable records and index data therefor from the incoming database data entry stream is stored in the database memory as represented at block 79. If the database memory 55 is full, then the database handling means refers to the search parameters which correspond to the current input user commands, if they exist, as represented by block 81. If the incoming record is deemed to be relevant in the light of the search parameters, then the database handling means calculates which records may be deleted and overwritten by the incoming record and replace the old record with the new record.

With any new database data which is to be stored, as represented at 79, the displayable record extracted from the data is transferred to the database memory 55 and stored at a prescribed memory location. Concurrently with this, the extracted index data associated with the displayable record is entered into an index table which is also stored within the database memory 55.

The database index table is most important as it contains indexes to all of the displayable records as they exist within the database memory at any particular instant of time. Consequently the database index table is changed and updated simultaneously with the changing and updating of displayable records so that the existing displayable records within the database memory can be searched directly

-19-

in response to user commands.

Following the storage of displayable records and index data within the database memory, the receiver processing means returns to examining incoming database data as represented at 75.

A user can make a request for the communication of some of the information contained within the database at any time. Thus the third area or process is designed to respond to these user commands by searching the database in accordance with the search parameters input with the user commands and extracting displayable records which fall within the scope of the search parameters for viewing by user.

As shown in Fig. 3c of the drawings, the process as performed by the input means firstly involves monitoring any user commands which are input to the database receiver, as represented at block 83. In this respect, a user has a choice of displaying records stored within the database memory 55 which fall within a set of search parameters defined by the user commands. Accordingly when the appropriate user command is received via the interface decoding circuitry of the input means 31, the search parameters are updated or established as represented at 85 and the database memory 55 parsed for displayable records which fall within the established search parameters, as represented at 87. Whenever a displayable record is found that falls within the search parameters, the displayable record is formatted and passed to the communication memory

-20-

59 which is represented by block 89. As previously described, the communication memory 59 is used to generate the user display and it is only displayable records which are stored within the communication memory 59 that are actually displayed.

The communication process is performed by the means 33 for communicating database records and initially involved formatting the communication memory 59 according to a prescribed communication or display format according to user commands as is appropriate as represented at block 93 and then communicating the result using the character generating means 63 on the display screen 15 as represented at block 95.

It is possible that more displayable records exist that match the search parameters, since the database is continuously being updated with database data broadcast from the central station 11. In order to accommodate this situation, particularly as only a portion of the total database data is actually capable of being stored within the database memory 55, and that further time is required in order for the constitution of the database to be focused on the particular search parameters to store broadcast database data which previously was deemed not to be relevant. facility is made for the user to input user commands which allow scrolling up or down through the displayed list of records. Consequently, as more records are located from the dynamic database which match the search parameters these are passed to the communication

memory 59 to be added onto the end of the list records to  
be displayed or which are being displayed and subsequently  
are displayed at the appropriate time to synchronise with  
scrolling by the user. This step is represented by block  
5 97 where additional displayable records are added and  
subsequently displayed.

With respect to the formatting of the displayed records  
as represented at block 91, this formatting is performed  
according to a prescribed format which is pre-stored in the  
10 database receiver. This communication format is definable  
separately by appropriate control data broadcast from the  
central station 11 whenever considered appropriate.  
Importantly, it does not accompany each database data  
entry, hence maximising the volume of database data which  
15 is broadcast and hence greatly improving the efficiency of  
the system.

It should be appreciated that the present invention  
described with respect to the first embodiment has many  
advantages over previous distributed database systems such  
20 as Videotex and Teletext. Moreover, the particular concept  
of using a data record as the basic logic unit rather than  
a fully formatted page, as is the case with Teletext,  
provides for more records to be transmitted more quickly.  
This is especially useful if the records are small such as  
25 in small advertisements.

Furthermore, the particular method of processing the  
received information and determining storage before  
displaying the same and the methodology of searching and

-22-

displaying selected records instead of complete pages,  
overcomes the many limitations of Teletext. Accordingly in  
the present system, the majority of data which is  
transmitted are actual displayable records, whereas this is  
not the case in Teletext. Moreover in Teletext, the pages  
for eventual display are pre-formatted at the central  
station and therefore are transmitted as complete pages  
with display information, formatting characters and display  
colours. Thus, normally a large amount of empty space must  
be transmitted in every page that is transmitted making the  
Teletext method of broadcasting extremely inefficient.

Consequently, by using the present invention, a  
database structure is built up within the database receiver  
which can be perceived by a user to have many levels. Thus  
a user may generate a new level by inputting a search  
request command and the search parameters for the search  
request. Conversely, a user can retrace past searches by  
recalling previous levels, since the database data relied  
upon is still stored within the database memory. Thus a  
hierarchy of a theoretically unlimited extent of  
information can be built up.

Another feature of the present embodiment is that every  
"packet 31" decoder 45 has a subscriber address which is  
defined in the World Standard Teletext specification.

This address comprises a unique number which is contained  
within circuits associated with the microprocessor thereof.  
The existence of these numbers means that the central

-23-

station may address a particular user or set of users at receiver stations 13 and restrict information flow as required. Therefore a means is provided by which the central station can control the destination of information and thereby allow for subscription collection schemes to be set up to facilitate the commercial implementation of the system.

In one example of such an implementation, initially two data streams will be broadcast from the central station. One stream contains subscription data where access is only available after payment of a prescribed subscription fee and enabling of the database receiver, and the other stream is free to air. In other words there is a free component and a subscription component thereby providing two tiers of access.

Once the decoder is turned on, (and the appropriate channel selected on the TV) the database receiver displays the initial menu on the display screen of the TV or displays a flashing icon which shows that data has been received and is available for processing or display. Each menu item has a two digit code number (ie. there can be up to 100 categories: 00 - 99 in total). For example category 00 may be classified advertising on the free or basic tier, category 01 may be a "Yellow Pages" type services directory and category 02 may be the newspaper. Categories 03 - \*\* may be the remainder of the free services. Categories \*\* - 99 (if all 100 categories are used) may be the subscription services and are not

-24-

accessible to a non-subscriber. These categories appear on the screen and are designated in some manner as a subscription service, ie. there will be a block denying access to those categories to a free service user only.

5 This initial menu is be transmitted with the data and may change from time to time as categories are added, or deleted.

Once a user has made the initial selection by keying in the appropriate two digit code as a user command on the remote control interface, a second menu will appear, offering sub-categories of the initial choice. Again each sub-category is designated by a two digit code. At the level of sub-categories, all choices are available, ie. there being no distinction between free and subscription services. By way of example within category 00, ie. classified advertising, the first sub-category menu will offer the range of classifications, eg. for sale, real estate (for sale and rental), motor vehicles and employment. Each first level sub-category will be presented in blocks determined by the size of the database, eg. real estate A-C, or sale T-Z. Further differentiation into location, product, etc., will occur at the level of the next sub-category menu. Similarly the first level sub-category menu for category 02 (newspaper) will offer the various sections of a newspaper eg., sport, finance (international and domestic), world news, politics (State and Federal). etc. Subsequent sub-category menus will effectively allow scanning of the newspaper by eg. company

-25-

name, politician, country, football code, etc. Sub-category menus will be transmitted with the data in the same manner as the initial menu, allowing the available options to be altered as required to perform to a changing database.

At the level of all sub-categories, there is a maximum of 98 choices available (01-98). In addition to the sub-category choices (all levels), two digit codes (00 and 99) are reserved for exit comments. One enables the user to return to the opening menu, the other to initiate processing without the inputting of any further sub-category information. The exit commands appear as separate keys on the remote controller interface marked "exit" and "process" respectively. The exit command is able to be used to leave a display page and return to the initial menu. Consequently the sub-category menu screen displays up to 98 choices plus prompts for the user of the two screen exit keys. The remote control interface also has "page up" and "page down" (or "next" and "previous") keys to allow scrolling through large classifications.

Once the "process" key has been used (automatically when there are not further sub-category menus available on the pathway selected by the user) the database receiver generates a display of all the information meeting the criteria determined by the category/sub-category selection process, depending on the nature of the information provided. In some instances there will be no sub-categories at all whilst in others there may be up to four.



-26-

By adopting the present technique of storing database data within the database memory, processing time is kept to an absolute minimum before the first screen of selected information is available to the user.

5 It should be appreciated that the present embodiment provides for the expansion of the services available as described in the above example in terms of the size of the database. In this respect the database receiver is capable of looking for data on any of the channels within the RF  
10 range of the television user. Thus the database receiver is designed to have the ability to draw information from a number of carrier VBIs or from a full field data broadcast.

With reference to Fig. 4, a further example of the distributed database system of Fig. 1 is provided which  
15 incorporates a return link.

In the context of TV multimedia which receives forward directional information from a high bandwidth broadcast (point to multipoint) channel carrying RDS, TV packet 31 or their digital domain equivalents (MPEG, MPEG2 and  
20 Orthogonal frequency division multiplex broadcast data packets), for interactivity a point to point return link is needed. This return link communication can be of comparatively low speed.

25 A return link based upon a low speed frequency or phase shift keyed signal which uses standard signalling but is capable of only unidirectional operation may be constructed with relatively few parts.

With reference to Fig. 4 a multimedia TV apparatus 110

-27-

comprises a TV station 111 in forward communication with a multimedia TV set 113 by way of TV signal 112.

TV signal 112 is communicated via aerial 114 to a tuner 127 of a multimedia TV set which is adapted to be tuned to a TV signal of a particular television channel and to deliver video and audio information derived from that channel. The multimedia TV apparatus 110 additionally includes a multimedia microprocessor 123 which is adapted to derive data delivered via TV signal 112 from database 118 and to instruct the generation of a database visual information signal 117 based on that data for display on display 116.

In this example, the display processor 115 comprises a microprocessor 123 in communication with a data acquisition device 121, a display generator and display memory 131, 130 respectively and a data storage device 122. T.V. tuner 127 receives a TV signal 112 and derives primary data from a particular channel for display on display 116. The tuner also makes available to data acquisition device 121 from signal 112 information containing secondary data. The data acquisition device 121 derives the secondary data in conjunction with and under control of microprocessor 123 for display via display generator 131 on display 116 either over the top of or in conjunction with or instead of the visual information relating to the primary data. In addition microprocessor 123 can initiate the transmission of data from multimedia display processor 115 back to data base 118 of TV station 111 via an interface 141 adapted for

-28-

connection to return link 140.

The data from database 118 can be encoded according to packet 131 protocol in the vertical blanking interval of TV signal 112. Other forms of permissible encoding for the data have been described previously. As will be appreciated TV signal 112 is representative of a one way forward link between TV station 111 (including database 118) and a multiplicity of multimedia TV sets 113.

A return link 140 according to this example is also illustrated in Fig. 4 and comprises a unidirectional link to database 118 in TV station 111 from multimedia microprocessor 123.

Return link 140 can be implemented via the public switched telephone network (PSTN), cellular or GSM telephone networks.

In this particular example as will now be described the return link 140 is implemented via the public switched telephone network operating between microprocessor interface 141 and database interface 142.

With particular reference to Fig. 4 the display processor interface 141 comprises a filter 143 adapted to shape and band limit encoded data signals generated by a microprocessor 123 (for example from the communication ports of an Intel 8051 microprocessor) and to pass the shaped and band limited signal to a line interface circuit 144 for connection to the PSTN.

Interface circuit 144 can comprise a line isolation transformer or an optoisolator and a relay for line

connection.

In order to initiate transmission of data from multimedia display processor 115 to database 118 the microprocessor 123 connects the interface circuit 144 to the PSTN by activating the relay and then sends data by signalling. As the microprocessor 123 will not have an acknowledgement via return link 140 that the data has been received its software waits for an acknowledgement to be received embedded in the incoming broadcast system signals. The software operations of microprocessor 123 relevant to return data transmission are listed in Fig. 5.

It will be noted in Fig. 5 that if no acknowledgement is received to the data sent via return signal 140 then a redial and retransmission can be initiated by microprocessor 123 after predetermined periods of time.

With further reference to Fig. 4, a data storage 122 is partitioned into two portions, namely displayable data store 125 and executable data store 126.

The data stored in displayable data store 125 comprises data which, ultimately, will be translated into an image for superposition on display 116.

Executable data store 126 receives data comprising executable programme code for execution by data manipulator 123.

In use, when determining the manner in which to display displayable data derived from displayable data store 125, the data manipulator 123 executes code derived from executable data store 126. Accordingly, the manner in

which displayable data is displayed on display 116 can be altered by amendment of the executable data located in executable data store 126.

Alteration can take place by substitution of new data acquired from database 118 via television signal 112.

In this embodiment the data storage 122 comprises flash memory which is a form of electrically erasable read and write memory. Accordingly data is maintained in a stored condition unless and until a specific substitution operation is performed.

Data manipulator 123 includes means for performing specific substitutions and further includes means for determining the nature of the data 120 received via the data acquisition device 121.

In one particular form the means for determining the nature of the database data comprises a control programme which resides in executable data store 126. The control programme interprets object identification header information associated with data objects transmitted in the Vertical Blanking Interval according to Packet 31 Protocol so as to determine the nature of the data contained within the object.

The control programme can then make a decision as to what is to be done with that data including the making of a decision as to where and whether the data is to be stored.

Broadly the data may be of a displayable nature intended for display and which is termed displayable data in this specification. Alternatively the data may be in

the nature of executable code which can, for example, be directly executable by the data manipulator/CPU 123 or can be executable by the data manipulator/CPU after passing through an interpreter (which itself can form part of the control programme) or can comprise look up table data adapted for modification of the behaviour of executable code already resident in executable data store 126.

Functionally the control programme will determine the data to be one of the following types:

- 10           a)     Displayable data for storage in displayable data store 125;
- b)     "Stream" data destined either for direct processing and display on display 116 or for temporary storage in the temporary data portion 15           128 of displayable data store 125 prior to display on display 116;
- c)     Subscription control data addressed to the multimedia display processor - the subscription control data modifying the behaviour of the 20           control programme for the subscriber (the data can be in the form of look up table data and is broadly categorised as executable data for storage in executable data store 126). The subscription control data can also, for example 25           include acknowledgement data relevant to communications which have taken place between the multimedia television set 113 and data base 118 by a communications route other than television

-32-

signal 112.

- d) Executable data comprising a programme or programmes for execution by the data manipulator/CPU 123 - such programmes might include display presentation programmes and the like, and
- e) Data which it is determined is not destined for the multimedia display processor 115 and which is either, therefore, ignored or rerouted elsewhere.

10       The data originates from data base 118 and it is broadcast as discrete objects each of one type. Header information associated with each object is encoded with the object prior to transmission so that the nature and type of the information contained within the object can be

15       determined by the control programme operated by the multimedia display processor 115 following reception by the television set 113.

      The TV set 113 of Fig. 4 can optionally include a second tuner 129 which is in communication with data

20       acquisition device 121 and is adapted to receive secondary data from a signal other than TV signal 112. The optional signal 145 can, for example, be a commercial FM radio signal containing secondary data encoded in accordance with the RDS system.

25       With reference to Fig. 6, a system substantially the same in operation to that described in respect of Fig. 4 will be described in detail.

      Like components are numbered as for Fig. 4.

-33-

The system of Fig. 6 additionally includes a cordless telephone assembly 150, the handset portion 151 of which includes approximately 8 extra function buttons 156. The multimedia display processor 115 is built into the base station 152 of the cordless telephone assembly 150 (which becomes a "set top box" 155) and is connected to the television set 153 by a SCART or composite video connector 154. The display processor 115 controlled by the buttons 156 on the handset portion 151 via the RF connection 157 to the base station 158. (The number and designation of the buttons can be the same as on a standard infra red remote control with a standard set top box.) In this implementation there need be no infra red connection. The display is still presented on the television set 153, and the card can still dial numbers embedded in the data broadcast feed. The handset can also be used to dial out as a normal cordless telephone - ie. either the handset 151 or the processor 115 can set up calls.

In an alternative implementation the display processor 115 is located in its own set top box 155 connected to the television set 153 by a SCART or composite video connector 154. It is controlled by a standard infra red remote control unit 159. The infra red remote control unit 159 also contains the handset portion 151 of the cordless telephone 150.

In the example of Fig. 6, the major data processing functions of the display processor 115 are divided into two parts - database retrieval and stream data monitoring.



-34-

Database data is recorded automatically to memory under the control of the CPU and subsequently fetched if requested by the user. Dependent upon the nature of the service, the database data may be stored in memory for a period of minutes, hours or (rarely) days before being replaced automatically by updates - i.e. the user is not able to control the replacement of database data by updates. Nor is the user able to input any data (other than commands) - there is no keyboard or disk drive.

The only situation in which database data is retained after replacement is if the data in question is in display memory at the time the update arrives. Database data may include bitmaps but does not consist of pre-formatted Word-type documents. Examples of database data are TV guides and newspapers. Data that will be formatted (by executable data) into the initial menus (which form the basis of the user interface) is also be held in memory.

Stream data is not recorded to memory unless a specific request has been entered by the user through a monitoring application. Only that portion of the total stream containing the most recent data that complies with all the request details entered by the user is stored - i.e. historical stream data is not stored. Once recorded to memory the stream data is stored in memory until erased by the user (i.e. on exit), overwritten (due to limited storage space) or superseded by more current data captured in response to the same user request - i.e. a recurrent monitoring programme. Examples of stream data services are

TAB, stock market, classified advertising and services directories. The menus for these are generated by database data associated with executable data.

Data broadcast data and multimedia TV data may substantially intersect. The multimedia TV data may in some instances be a subset of the data broadcast data. The stream data, some of the executable data and some of the database data of the multimedia TV data may be common with the data broadcast services. Subscriber control is the same. The one VBI can carry both services. All previous assumptions regarding the format and structure of the data broadcast signal will apply to multimedia TV data - i.e. Packet 31 transport layer and POST protocol object packaging (refer later description). Data broadcasting is however generally intended and destined for Personal Computers rather than television receivers.

When the multimedia display processor 15 is housed in a set-top box 155, it will connect to the television set 153 by a SCART connector.

However, the set-top box 155 will have its own power supply and infra red remote control 16.

Fig. 7 is a concept diagram for a distributed database system 210 incorporating a plurality of database receivers 211 adapted to receive data from more than one source.

In the arrangement of Fig. 7 there is illustrated one receiver 211 per household 212 although a household could operate more than one receiver 211 if so desired.

The fundamental building block of the system comprises

each receiver 211 whose intelligent data processing characteristics allow the flexibility and usability in the broad context of multimedia systems not previously available.

5           Each receiver 211 is adapted to receive and process a data stream embedded within a carrier signal. The primary example given in this specification the data stream 213 is embedded in the vertical blanking interval portion 214 of television broadcast signal 215.

10           The organisation of the data stream 213 is important if maximum useability of the system is to be achieved. The organisation of the data stream 213 must lend itself to rapid interpretation by receivers 211 whilst making the best use of the bandwidth available to it. Utilisation of  
15           the vertical blanking interval portion 214 of a TV broadcast signal 215 is but one example of a datacasting method, all of which tend to be categorised by a relatively narrow bandwidth compared to the total bandwidth of the signal in which the data stream 213 is embedded.

20           TV station 216 can contain the database and data inserter from which data stream 213 originates and TV broadcast signal 215 can be delivered by any one of a number of known methods including VHF/UHF transmission, microwave transmission, satellite transmission, fibre optic  
25           transmission.

          The distributed database system 210 described thus far can be utilised in conjunction with a television set in communication with each receiver 211 whereby data from data

-37-

stream 213, broadly categorised as either displayable data or executable data is processed by receiver 211 whereby at least portions of the displayable data can be displayed as database visual information on the television set screen in accordance with processing and commands forming part of the executeable data as interpreted and executed by receiver 211.

Functionality can be added to the above described system by including access for each receiver 211 to the public switched telephone network or similar service. The public switched telephone network 217 adds bidirectionality to the distributed database system 210 and also adds a further source of data or at least provides a mechanism for access to a further source or sources of data.

In the particular case of the public switched telephone network 217 this network typically includes as an inherent feature an accounting and debiting mechanism for data which passes through the network.

Data accessed via the public switched telephone network (PSTN) 217 can be delivered to each receiver 211 by means such as electrical conductor, fibre optic cable, satellite delivery, microwave delivery or mobile telephone network delivery.

In many countries today PSTN access to the average household 212 is still narrow band (of the order of 5 kilohertz) however it is expected that the effective bandwidth of these services will be increased progressively as optical fibre networks replace electrical conductor

networks and also as data compression technology advances.

In the description of examples to follow, additional detail and methods of implementation of receiver 211, the packet structure for data stream 213 and a complete distributed database system 210 derived from these  
5 fundamental building blocks will be described.

Fig. 8 illustrates a further example of the distributed database system of Fig. 1 which serves to illustrate the diversity of data which can be accessed by a user of a  
10 receiver 211 when multiple data sources are made available in the manner generally illustrated and described in respect of Fig. 7.

Conceptually the receiver 211 can be thought of as a data sorter and selective switch making available to an end  
15 user in an easily and often quickly accessible form despite the relatively narrow bandwidth of at least some of the channels over which the data must pass.

In this example receivers 211 can be linked to a television set 219, a remote personal computer 220 or a  
20 remote printer 221. All of these devices can receive data from the Vertical Blanking Interval of a television signal broadcast via satellite or aerial 222. Data is inserted into the Vertical Blanking Interval (for example utilising the packet 31 transport layer with POST protocol as later  
25 described in this specification) by high speed data inserter 223. The inserter can be, for example, a type DBL 95 which provides an aggregate data rate of greater than 38,400 bits per second.

The data inserter 223 receives data from a database located on file server computer 224. The file server computer 224, in turn, can receive data from other sources via terminal server 225 receiving information from third party information suppliers 226.

Ordinary television programme material is also schedule via TV station scheduling computer 227, and sourced with replay machine 228 and video programme source 229.

The data thus provided to television receiver 219, PC 220, printer 221 and/or display board 230 is clearly unidirectional in nature.

In addition a bidirectional signal path 231 is provided via PSTN 232. A user of a receiver 211 in conjunction with television set 219 and telephone handset 233 can access or be put in contact with information sources operating through PABX 234, message bank 235, individual telephone system subscriber 236.

The bidirectional signal path 231 provides a three tiered capacity. Firstly, it permits of an outgoing message into the PSTN which may or may not elicit a response. Secondly, it permits a request for information from any information source connected to the PSTN. Information available may be of any type, eg. pre-recorded audio information, video information via an ADSL system. Thirdly, the signal path permits the setting up of a voice call.

A return link processor 237 orchestrates receipt, supply and confirmation thereof of information accessed via

-40-

the PSTN 232. The return link processor 237 may communicate with the file server computer 224 via terminal server 225 and can also communicate with financial services computers often connected on their own network 238.

5 It will be appreciated that the information services made available to devices such as remote printer 221 remote display board 230 and remote PC 220 are in the range of databroadcast as previously described whereas the information resources made available via receiver 211 to  
10 television 219 are of the broader nature previously described with particular reference to Fig. 6.

In order to give full effect to the capabilities of receivers such as receiver 13 described with reference to Fig. 1 and receiver 113 as described with reference to  
15 Figs. 4 and 6 and receiver 211 described with reference to Figs. 7 and 8 an appropriate data structure should be implemented within the packet 31 transport layer (or other databroadcast transport layer). A particularly suitable "object oriented" packet structure will now be described.

20 Figs. 9A to 9G illustrate a specification for an object oriented packet structure for use for the transport of data of any of the examples of the invention as described above.

Data is transmitted in the form of packets - that is, as a series of individual messages, each consisting of a  
25 number of bytes in a specified format. This format is defined by the protocol being used. This section describes the Protocol for Object and Stream Based Transport,

-41-

hereafter termed POST, which is designed specifically for databroadcast applications.

POST packets may be transmitted directly over the broadcast medium, or they may be contained within packets conforming to another protocol. This "layering" of protocols allows POST to take advantage of the facilities provided by another protocol that may have been tailored for a particular medium or environment.

Since television transmission, and hence databroadcast, is unidirectional, receivers cannot acknowledge the successful reception of data. Consequently, a single transmission is usually repeated an arbitrary number of times to reduce the chance of data loss - the probability of a packet being corrupted in every retransmission rapidly diminishes as repetitions increase. As excessive repetition needlessly wastes bandwidth, field tests are conducted to determine the optimum number of repeats in a given installation. Alternatively, some form of error correction (where corrupted packets are "repaired" at the receiver) may be employed.

The Protocol for Object and Stream Based Transport (POST) is designed to insulate the application developer from the details of the databroadcast medium, and to facilitate the rapid development of databroadcast applications.

Numerous data services can be broadcast simultaneously, with each service identified by a service number. The



service number is an important part of the control information associated with most POST packets. A receiver's ability to receive a particular service can be regulated as part of a subscription scheme administered by the databroadcast operator.

POST is based on the assumption that data can be represented in one of two ways: as a continuous stream, or as discrete objects. For example, a news article can be considered an object, while "live" stock market information can be thought of as a stream. Objects are grouped together in classes defined by the service provider. Object classes could include file, fax, bitmap, soundtrack and programme.

To support this model, POST defines two types of message that may appear in a packet: the Stream message and the Object message.

In addition to the Stream and Object message types, a Command type is provided for high-level control purposes. It is very similar to the stream type, but provides a command facility independent of actual service data. The definition and implementation of commands is left to the service provider.

Finally, a Subscription Control message type is provided to allow the databroadcast operator to regulate receivers' access to the services available on the system. Note that this mechanism is completely independent of the Command message type.

Each POST packet includes a header that contains various control fields indicating its format and identifying its contents. For example, every POST packet includes a Message Type field and a Length field. Some of the information found in the header is not required in every packet or in every installation. For example, if POST packets are carried by an underlying protocol that provides error detection itself, the error detection facilities of POST are not required. As bandwidth is at a premium, unnecessary information and unused portions are eliminated from individual packets whenever possible, while facilities are provided for the inclusion of various additional information where it is required.

To achieve this, POST makes use of variable headers. Every header contains essential information, plus a small indicator field indicating the presence or absence of additional, optional information. If not required, this optional information is not included, and only the small overhead of the indicator field is incurred.

With reference to Fig. 9A a POST packet generally consists of a packet header and a data field or message, and is delimited by start and end fields for synchronisation. The packet type and format, and other control information such as the service to which the packet belongs, are specified in the packet header. A POST packet can also contain an error check field if the lower level protocol does not provide one. This error check, referred

to here as the CRC but by no means restricted to that specific method, can be omitted if not required.

A Subscription Control packet is a special case, described separately below.

5           The packet header specifies the packet type and format, and the service to which the packet is bound. A number of optional fields are also provided. Space is reserved to add additional fields and format flags.

10           The packet header has the format shown in Fig. 9B (except in the case of a Subscription Control message).

The field definitions are as follows:-

(i)    Message Type

The Message Type field specifies the type of message contained in the packet.

15           (ii)   CRC Type

The CRC Type field indicates the presence of a checksum at the end of the packet, and can also identify the error detection/correction scheme used.

(iii) Compression

20           The compression field indicates the compression scheme, if any, applied to the message field of the packet.

(iv)   Length

The Length field specifies the length of the message field.

25           (v)    Reserved Field

This portion of the packet header is reserved to allow future expansion.

(vi) Optional Field Flags

These flags indicate the presence or absence of the various optional header fields described later.

(vii) Service

5 The service field specifies the service to which the packet is bound. It can incorporate a service type indicator (eg. local/national). Extended service identification is supported by an optional header field.

(viii) Extended Service

10 The first optional header field is used to allow for the expansion of the service field.

(ix) Channel

The optional Channel field allows a Service to be subdivided for the simultaneous transmission of multiple objects or streams.

(x) Address

The optional Address field allows a packet to be directed to a specific receiver.

(xi) Sequence

20 If the underlying carrier protocol does not support sequencing (or is not present), this optional field can be used to sequence packets. This is most useful in stream transmissions, as objects have a separate sequencing mechanism built in.

25 With reference to Fig. 9C Stream and Command messages simply contain the raw stream or command data. to be processed as required by the service provider. All control

information relating to the transmission of the stream (most importantly sequencing information) is contained in the packet header.

The data in the message may be compressed, as indicated by the Compression field in the packet header. Note that as any sequencing and other control information occurs in the packet header, a receiver can decide whether to discard a packet before decompression is required.

With reference to Fig. 9D which illustrates an object message, an object is broadcast by being broken up and transmitted as a number of fragments. Accompanying each fragment is a number called the fragment offset. The fragment offset specifies the position of the fragment within the object.

The advantage of fragmentation is that transmission errors can be confined to just a few fragments - decoders can combine the good fragments from each repeat broadcast to form a complete set.

The optional Channel field in the packet header can be used to allow several objects to be transmitted simultaneously on the same service, by assigning each to a separate channel.

An Object Message is used to broadcast a fragment of an object. The message consists of a type field followed by the object fragment. There are three fragment types - Beginning of Object (BOO), Continuation of Object (COO) and End of Object (EOO). Essentially, one BOO fragment

initiates the transmission of the object, several COO fragments transfer the object data, and one EOO fragment ends the transmission. The EOO fragment may be smaller than the COO fragments.

5           With reference to Fig. 9E, the BOO fragment contains information about the object and the transfer itself.

The field definitions of a BOO message are as follows:-

(i)   Group

10           The Group field identifies a group to which this object is directed. The group can consist of one or more receivers. The grouping scheme is independent of the POST protocol.

(ii)   Class

15           The Class field contains a numeric value that specifies the object's class. The value is defined by the service provider.

(iii) Object Identifier

20           The Object ID field contains a number that uniquely identifies the object. The value is defined by the service provider.

(iv)   Object Size

The Object Size field specifies the size of the complete object.

(v)    Fragment Offset Length

25           The Fragment Offset Length specifies the length of the Fragment Offset field of subsequent COO and EOO fragments.

(vi)   Fragment Length

The Fragment Length field specifies the size of the object fragments in subsequent COO fragments.

(vii) Object CRC

5 The Object CRC field contains a cyclic redundancy check (CRC) of the complete object. It is used after the EOO fragment is received to confirm that the object has been correctly received and assembled.

10 With reference to Fig. 9F the object broadcast continues with "Continuation of Object" (COO) fragments. The last fragment is transmitted as an "End of Object" (EOO) fragment. These two fragment types are identical in format.

The field definitions are as follows:-

(i) Fragment Offset

15 The Fragment Offset field specifies the position of the fragment within the object. Fragment Offsets start at zero and increase by one for each fragment.

(ii) Fragment Data

20 The Fragment Data field contains the actual object fragment.

25 As subscription control is a fundamental issue in subscriber databroadcast services, a special message type has been dedicated to this facility. The format of the Subscription Control message is quite different from the other message types - the packet header is significantly stripped down.

Fig. 9G shows both the packet header and message

structures for a Subscription Control message.

To simplify processing, the packet header is similar to the first part of the normal packet header. Note that a packet CRC and compression are provided for. The packet length field is used, but other packet header fields are not supported. The Message Type field will always indicate a Subscription Control message.

The fields in the message portion of the packet are defined as follows:-

(i) Address

The Address field specifies the receiver to which the Subscription Control message is directed. This is the same kind of address that appears in the optional Address field of the standard Packet Header.

(ii) Command

This field contains the actual subscription control command. Typical commands include Subscription Service, Unsubscribe Service, and Unsubscribe All Services.

(iii) Continue

The Continue field indicates that the message contains another command after this one.

(iv) Service

The service field specifies the service to which the command applies.

(v) Extended Service

This optional field is used to specify an extended service number.



-50-

## (vi) Additional Commands

The Continue field allows multiple commands to the same receiver to be transmitted in a single packet. These commands appear consecutively in the message, with the Continue fields set in all but the final command.

Any one of the display processors referred to in the examples of receivers 13, 113, 211 can be implemented utilising VLSI logic as illustrated in block form in Fig. 10.

Components in Fig. 10 are numbered according to the first embodiment described with respect with Figs. 1, 2 and 3.

In this implementation CPU 51 can comprise an Intel 87C51FC embedded controller containing 32 Kbyte of programme memory. Closely coupled to CPU 51 is memory 55 comprising 128 Kbytes of RAM. Additional memory 59 comprising communication or screen memory services a display and acquisition device comprising a Plessey MV1815 IC performing the function of means for communicating 33.

Decoder means 25 comprises an Altera EPM 5128 device which decodes the raw packet data, selects the appropriate packet 31 channel, demultiplexes computer memory addresses for memory 55, selects the appropriate programme or data portion of memory 55 and writes the data out to FIFO 47. The FIFO is a QS 2704 IC utilised to buffer incoming packet 31 data destined for CPU 51.

Input output devices include power port 70 which

-51-

provides a source of 5 volt power and provides printer output from CPU 51.

I2C port 71 provides infra red remote control access.

5 A DTMF generator 72 attaches to PSTN interface 73 for dialling, modem signalling and general telephone network access. A SCART video output 74 provides data access to the television set under the control of means for communicating 33.

10 The above describes only some embodiments of the present invention and modifications obvious to those skilled in the art can be made thereto without departing from the scope and spirit of the present invention.

#### INDUSTRIAL APPLICABILITY

15 The database system and the individual receivers as described in various embodiments of the specification are particularly useful for the dissemination of a broad range of information to the home and office. The information can be visual or audible in nature and can be derived from more than one source.

CLAIMS

1. A distributed database system comprising:-

a central station for accumulating and distributing data on a database, and

a plurality of receiver stations for receiving said data and selectively making available at least portions of said data in accordance with the demands of a user of a said receiver station;

wherein said central station comprises: a data store for storing accumulated data from said database, ready for distribution; processing means for extracting said data from said data store and generating a sequential data stream therewith for distribution; and transmission means for encoding and transmitting said sequential data stream; and

a said receiver station comprises: decoder means to receive and decode transmitted data so as to reconstitute said database data therefrom; input means for a user of said receiver station to input user commands in respect of the demands of the user to said receiver station; receiver processing means for constituting a database from said data having regard to said user commands; memory means for storing data for constituting said database; and means for communicating selected data in direct response to said user commands.

2. The system of claim 1 wherein said decoder means includes: data acquisition means for extracting a serial data stream and a synchronising signal from the transmitted

signal; a data decoder to filter out data control information from said serial data stream and reconstitute said database data; and transfer means to continuously transfer a stream of reconstituted data to said receiver processing means.

3. The system of claim 2 wherein said receiver processing means includes further decoder means to examine said stream of reconstituted data and extract said index data therefrom; and database handling means to determine storage of individual database data in accordance with a prescribed algorithm, whereby in response to a decision to store or update said individual database data, said database handling means is adapted to transfer said individual database data to a requisite storage location in said memory means and perform contingency action according to a prescribed algorithm involving changing the structure of said database so as to continuously constitute said database.

4. The system of claim 3 wherein said memory means comprises a predetermined amount of available space for storing communicable records of the constituted database, a separate space for storing an index table relating the records, and a communication memory for storing records for said means for communicating.

5. The system of claim 4 wherein said prescribed algorithm requires said database handling means to have regard to available space in said memory means, and in the absence of available space, have regard to said user commands as input

with said input means.

6. The system of claim 5 wherein said prescribed contingency action also includes updating said index table with the index data of said individual database data being stored.

7. The system of claim 6 wherein said input means processes said user commands and a set of database search parameters input by a user, parses said constituted database stored within said memory means for communicable records falling within said search parameters, formats the selected records in accordance with a prescribed communication format, and passes said records to said communication memory.

8. The system of claim 7 wherein said means for communicating accesses said communication memory and includes a character generating means to generate characters for display purposes in respect of the communicable records stored in said display memory.

9. The system of claim 8 wherein said input means continuously parses said constituted database for additional communicable records falling within said search parameters and passes said additional records to said communication memory for communication purposes in response to receiving an appropriate user command input by the user.

10. The system of claim 9 wherein said prescribed communication format is separately definable by the discrete transmission of attribute data from said central station.

11. The system of claim 10 wherein said decoder means receiver processing means, input means and means for communicating operate concurrently with each other.

12. A database receiver for a distributed database system of the type defined in claim 1, said receiver comprising:-

decoder means to receive and decode data transmitted to the database receiver to reconstitute database data therefrom;

input means for receiving and processing user commands input by a user of said database receiver in respect of the demands of the user;

receiver processing means for constituting a database from said database data having regard to said user commands;

memory means for storing database data for constituting said database; and

means for communicating selected database data from said constituted database in direct response to said user commands.

13. A method for providing a distributed database for access and searching by a user comprising:-

accumulating and distributing data for the database to a plurality of users;

receiving and analysing the distributed data in accordance with the demands of the user for selective storage of the data;

searching the stored data in response to a user command having regard to the demands of the user; and

communicating selected stored data conforming to the demands of the user, to the user.

14. A method for receiving distributed database data and selectively communicating the same to a user comprising:-

receiving and decoding distributed data to reconstitute database data therefrom;

receiving and processing user commands representative of the demands of a user;

constituting a database from the database data having regard to the user commands;

storing selected database data for the constituted database; and

communicating selected database data from the constituted database in direct response to the user commands to the user.

15. A distributed database system comprising at least a primary database in communication via communication means with a plurality of remote receiver stations; each remote receiver station including storage means adapted to store at least a selected portion of said primary database, each said receiver station further including data processing means adapted to process information stored in said storage means.

16. The system of claim 15 further including input means for a user of a said receiver station and wherein said data processing means processes information contained in data sent from said at least primary database and also processes information received from said input means in order to

determine which portions of said data and in what manner said portions of said data are to be presented to said user by said receiver station.

17. The system of claim 16 wherein the communication means comprises a selected portion of a TV transmission signal.

18. The system of claim 17 wherein said storage means is sufficient to store substantially the contents of said primary database.

19. The system of claim 17 wherein said storage means is sufficient to store only selected portions of substantially the contents of said primary database.

20. The system of claim 17 wherein the data stored in said primary database comprises more than one type of data.

21. The system of claim 17 wherein each said remote receiver station is adapted to receive and process said database data and to selectively receive and process said stream data.

22. The system of claim 16 wherein said communication means includes a first communication link adapted for transmission of data from said primary database to said plurality of remote receiver stations and at least a second communications link adapted for communication of data from said plurality of remote receiver stations to said primary database.

23. The system of claim 22 wherein said at least second communication link additionally is adapted for selective communication with a plurality of databases.

24. The system of claim 22 wherein said at least second



communication link is bidirectional and comprises one of the public switched telephone network (PSTN), or cellular telephone network, or GSM telephone network.

25. The system of claim 22 wherein said subscriber stations connect to said at least second communication link by means of a microprocessor interface which comprises a modem.

26. The system of claim 25 wherein said first communications link is a high bandwidth link adapted to transmit primary data and secondary data with said primary data taking up a major portion of said bandwidth and said secondary data taking up a minor portion of said bandwidth.

27. The system of claim 26 wherein said at least second communication link has a relatively low bandwidth.

28. The system of claim 26 wherein said forward communications link comprises a TV broadcast signal and said primary data comprises broadcast TV information and said secondary data comprises database data.

29. The system of claim 28 wherein said data for transmission on said at least second communication link comprises a data message which may or may not elicit a response.

30. The system of claim 28 wherein said data for transmission on said at least second communication link comprises a request for information to be downloaded.

31. The system of claim 28 wherein said data for transmission on said at least second communication link initiates a voice call.

32. A remote receiver station for use with the distributed database system of claim 15, said receiver station further including input means for a user and wherein said data processing means processes the information contained in data received from one or more sources of data and also processes information received from said input means in order to determine which portions of said data and in what manner said portions of said data are to be presented to said user by said receiver station.

33. The station of claim 32 wherein said data includes displayable data and executable data.

34. The receiver of claim 33 wherein said data can include executable data adapted for storage in storage means in said receiver for execution by said receiver station.

35. The receiver station of claim 34 wherein said executable data includes a control programme adapted to recognise the nature of said data and to update and/or replace portions of said data resident in said storage means.

36. The receiver station of claim 35 wherein said receiver station receives at least some of said data by means of a packet based object oriented protocol.

37. The receiver station of claim 36 wherein said data is categorised in said protocol as either object data or stream data.

38. The receiver station of claim 37 wherein said objects additionally include command objects and subscription control objects.

39. A distributed database system comprising:

a central station for accumulating and distributing data on a database, said central station comprising:

a data store for storing accumulated data from said database, ready for distribution;

processing means for extracting said data from said data store and generating a sequential data stream therewith for distribution; and

transmission means for encoding and transmitting said sequential data stream; and

a plurality of receiver stations for receiving said data and selectively making available at least portions of said data in accordance with the demands of a user of a said receiver station, each of said receiver stations comprises:

decoder means to receive and decode transmitted data so as to reconstitute said database data therefrom;

input means for the user of said receiver station to input user commands in respect of the demands of the user to said receiver station;

receiver processing means for constituting a database from said data having regard to said user commands;

memory means for storing data for constituting said database; and

means for communicating selected data in direct response to said user commands;

wherein said decoder means includes:

data acquisition means for extracting a serial data stream and a synchronization signal from the transmitted data;

a data decoder to filter out data control information from said serial data stream and reconstitute said database data; and

transfer means to continuously transfer a stream of reconstituted data to said receiver processing means, and

wherein said receiver processing means includes:

further decoder means to examine said stream of reconstituted data and extract index data therefrom; and

database handling means to determine storage of individual database data in accordance with a prescribed algorithm,

whereby in response to a decision to store or update said individual database data, said database handling means is adapted to transfer said individual database data to a requisite storage location in said memory means and perform contingency action according to said prescribed algorithm involving changing the structure of said database so as to continuously constitute said database.

40. The system of claim 39, wherein said memory means comprises:

a predetermined amount of available space for storing communicable records of the constituted database;

a separate space for storing an index table relating the records; and

a communication memory for storing records for said means for communicating.

41. The system of claim 40, wherein said prescribed algorithm requires said database handling means to have regard to available space in said memory means, and in the absence of available space, have regard to said user commands as input with said input means.

42. The system of claim 41, wherein said prescribed contingency action further includes updating said index table with the index data of said individual database data being stored.

43. The system of claim 42, wherein said input means processes said user commands and a set of database search parameters input by a user, parses said constituted database stored within said memory means for communicable records falling within said search parameters, formats the selected records in accordance with a prescribed communication format, and passes said records to said communication memory.

44. The system of claim 43, wherein said means for communicating accesses said communication memory and includes a character generating means to generate characters for display purposes in respect of the communicable records stored in said display memory;

wherein said input means continuously parses said constituted database for additional communicable records falling within said search parameters and passes said additional records to said communication memory for communication purposes in response to receiving an appropriate user command input by the user; and

wherein said prescribed communication format is separately definable by the discrete transmission of attribute data from said central station.

45. A remote receiver station for use with a distributed database system comprising at least a primary database in communication via communication means including a television signal with a plurality of remote receiver stations, comprising:

storage means adapted to store at least a selected portion of said primary database;

data processing means adapted to process information stored in said storage means;  
input means for a user;

wherein said data processing means processes the information contained in data received from one or more sources of data and also processes information received from said input means in order to determine which portions of said data and in what manner said portions of said data are to be presented to said user by said receiver station;

wherein said data includes displayable data and executable data, and can include executable data adapted for storage in said storage means for execution by said remote receiver station;

wherein said executable data includes a control program adapted to recognize the nature of said data and to update and/or replace portions of said data resident in said storage means; and

wherein said receiver station receives at least some of said data by means of a packet based object oriented protocol.

46. The receiver station of claim 45, wherein said data is categorized in said protocol as either object data or stream data.


47. The receiver station of claim 46, wherein said objects additionally include command objects and subscription control objects.

## ABSTRACT

A distributed database system includes a central station for accumulating and distributing data on a database, and a plurality of receiver stations that receive the data and selectively make available at least portions of the data in accordance with the demands of a user. A transmitter encodes and transmits the sequential data stream for delivery embedded within television signals.

Patented by the U.S. Patent and Trademark Office

093344-022493

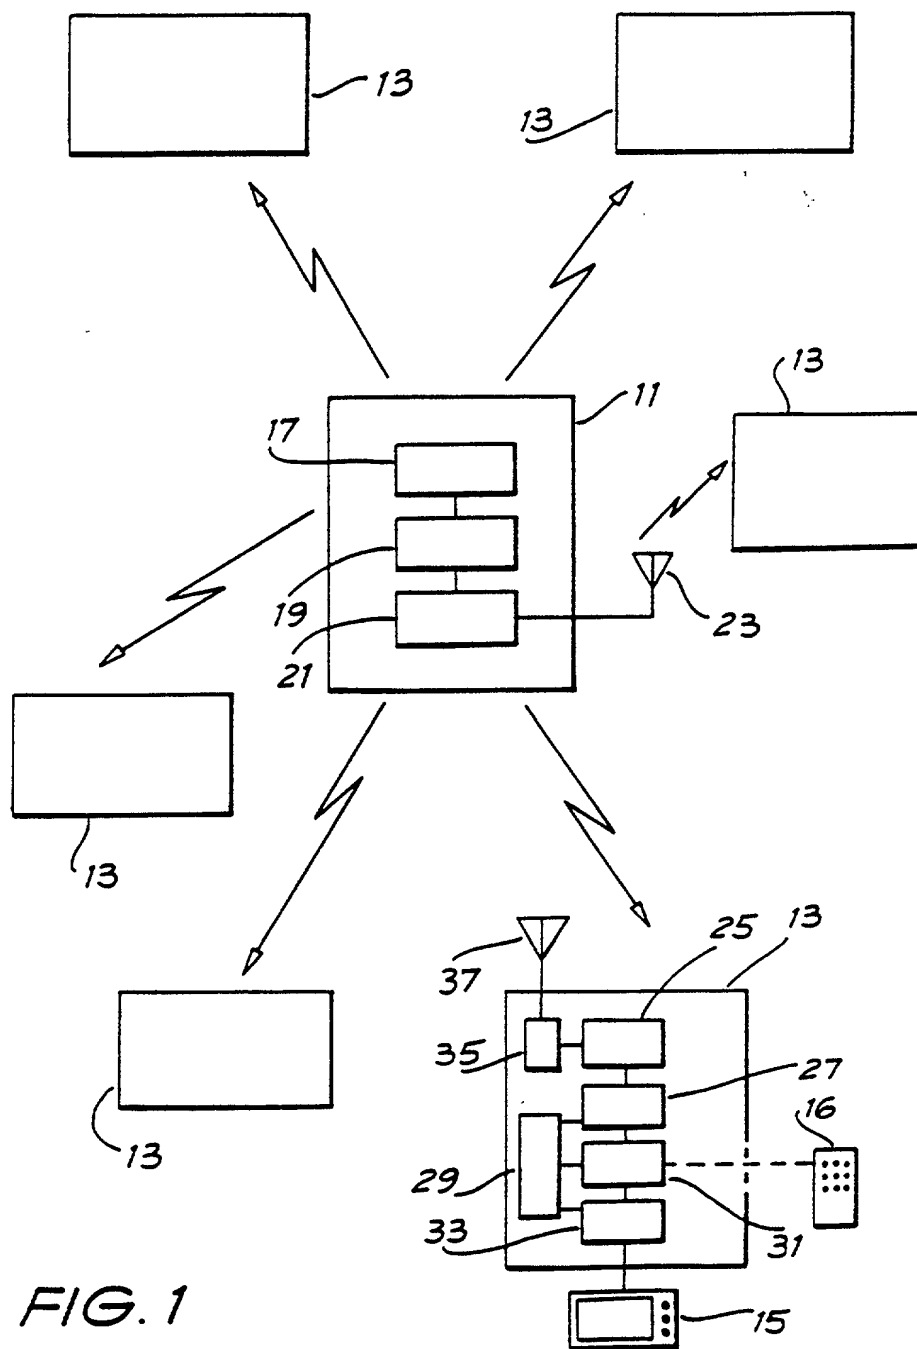



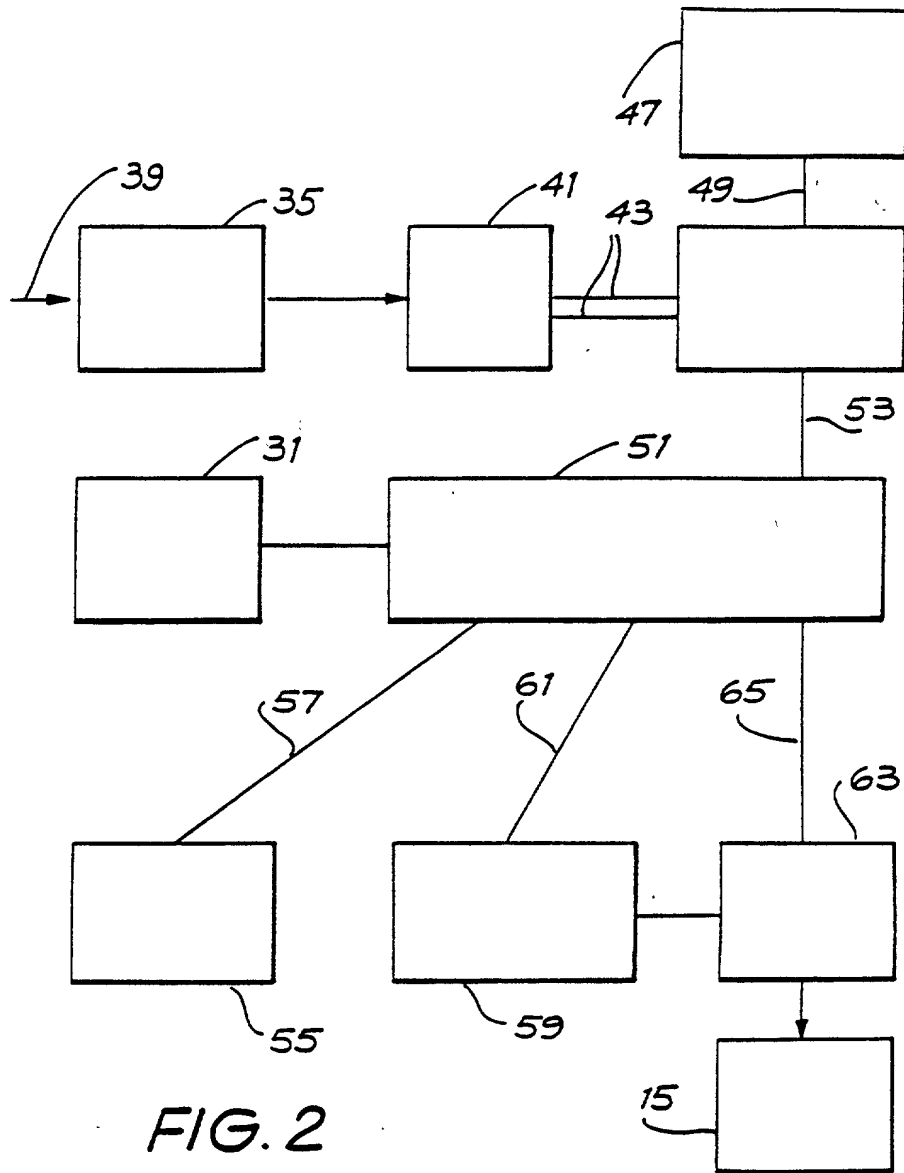
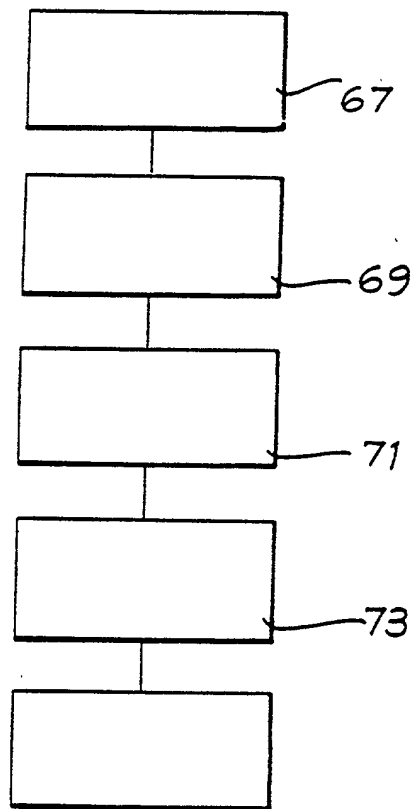


FIG. 2



*FIG. 3a*

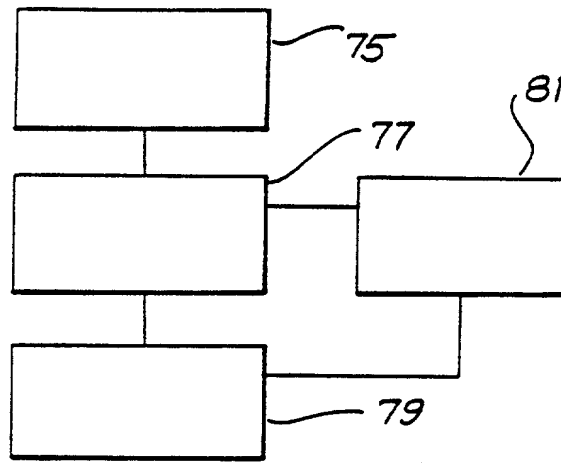
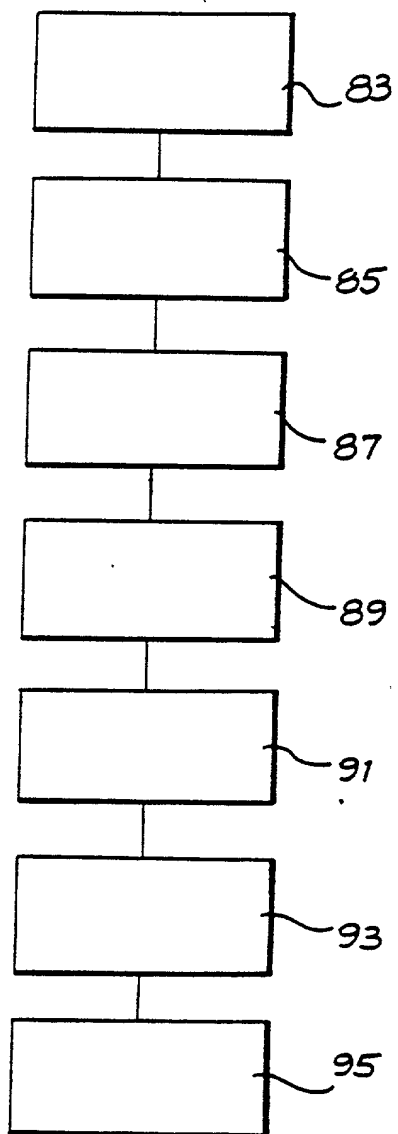


FIG. 3b



*FIG. 3c*

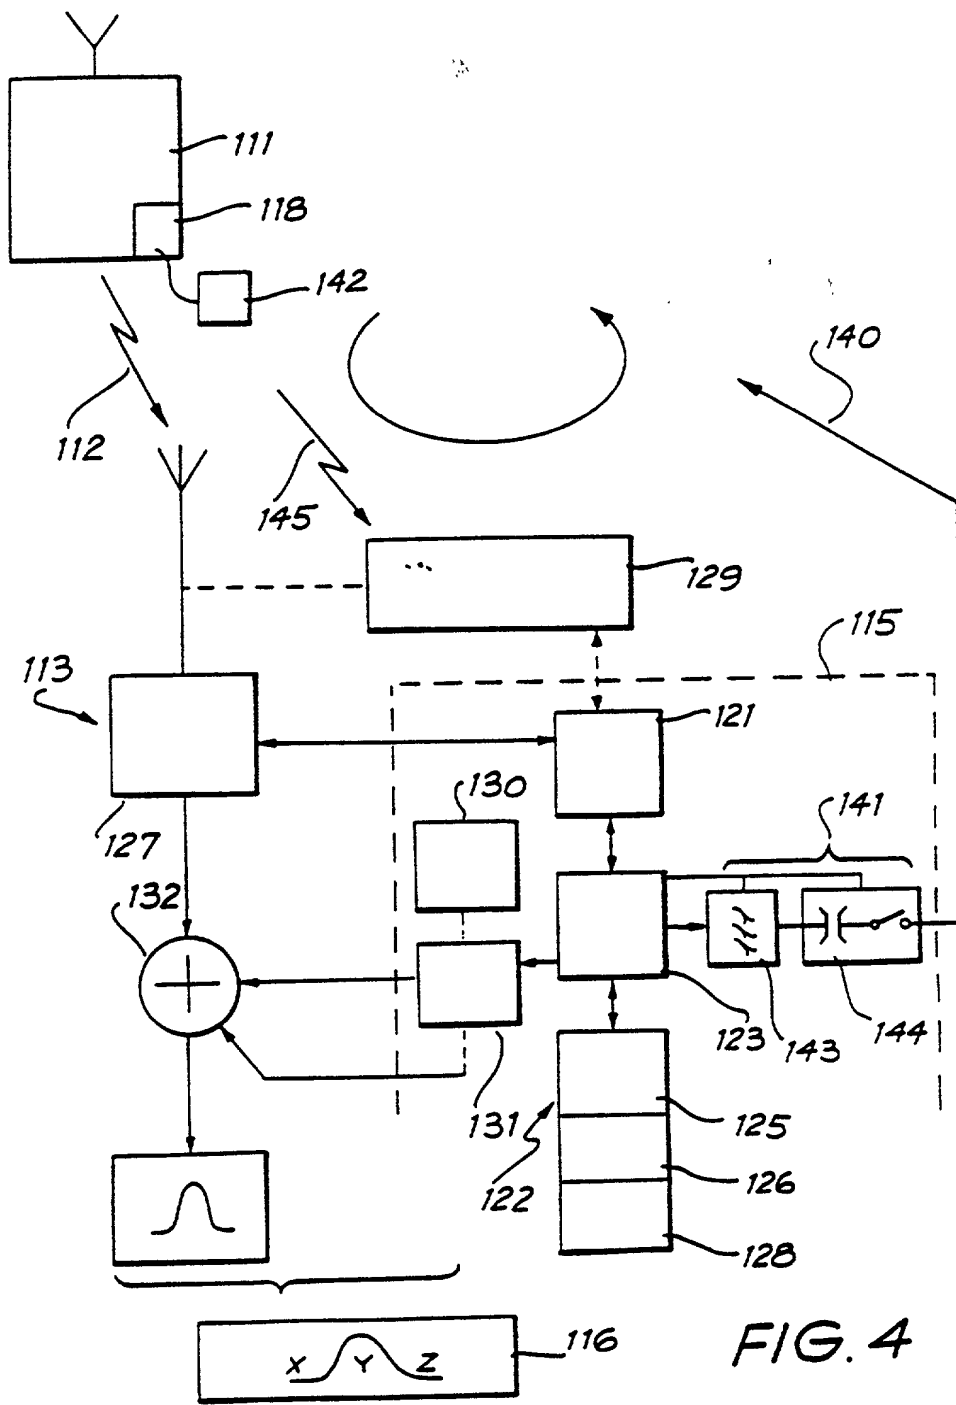
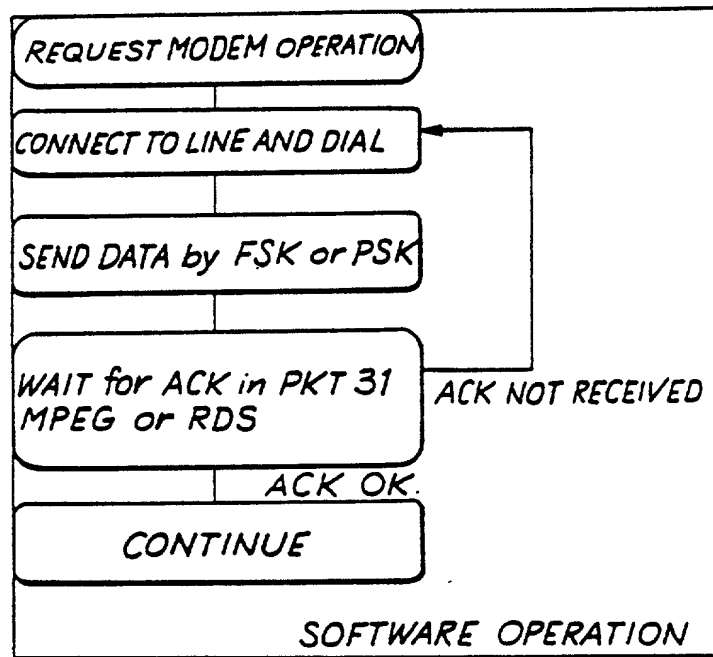
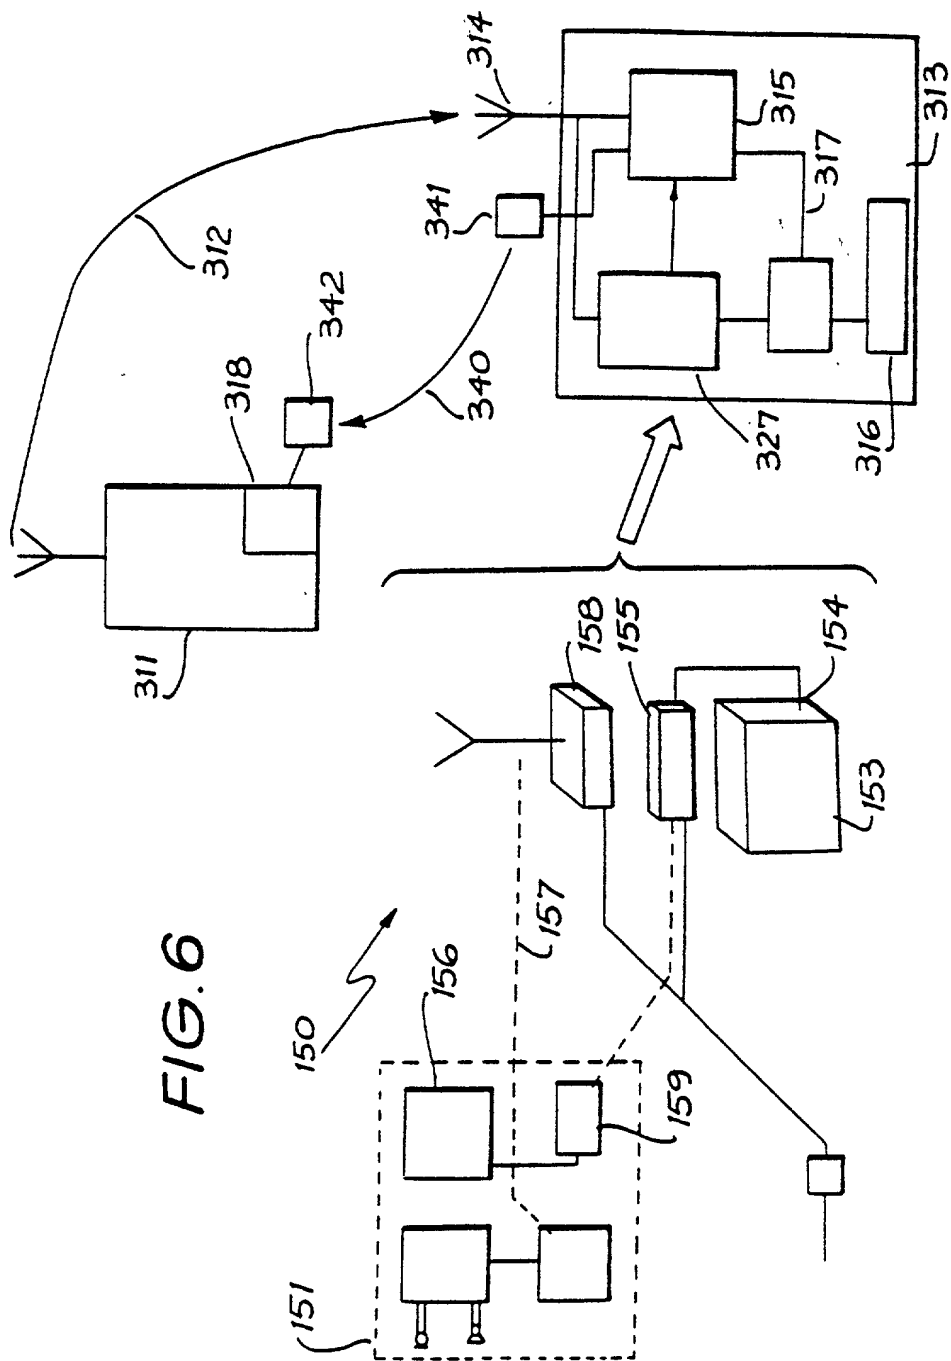


FIG. 4



*FIG. 5*



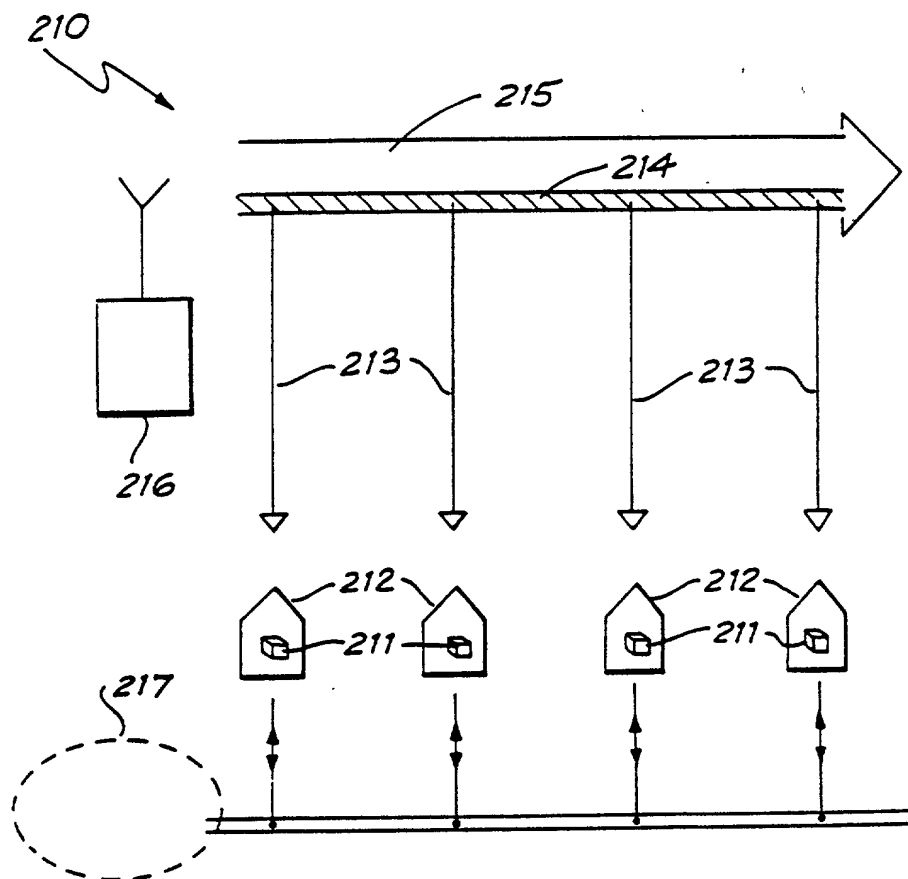


FIG. 7



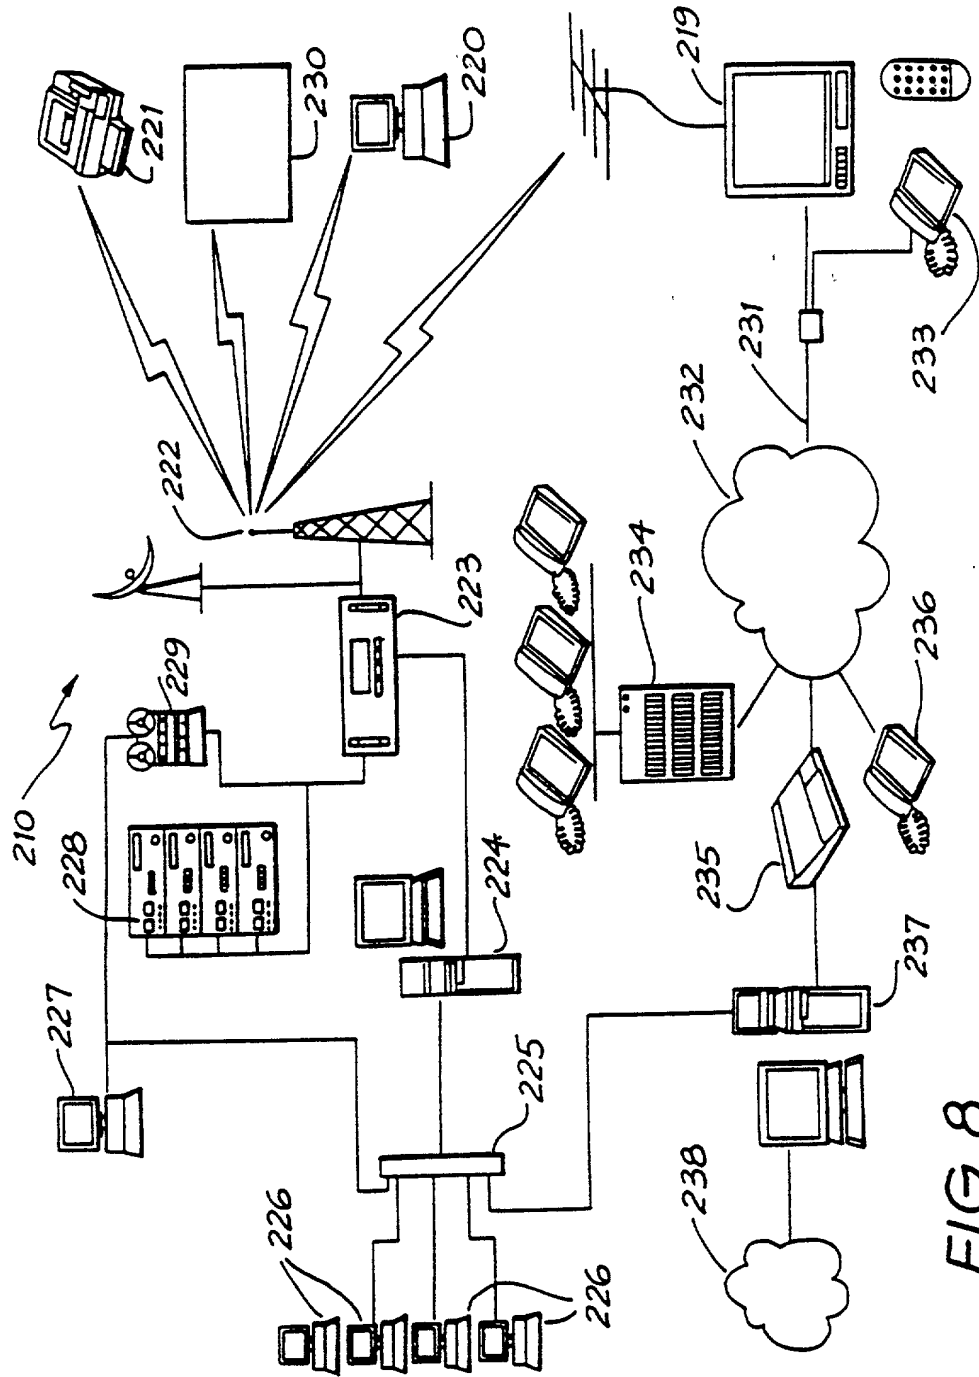


FIG. 8

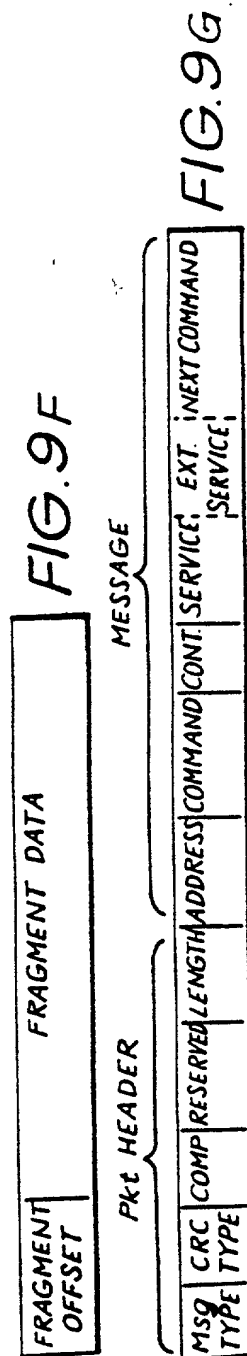






FIG. 9G

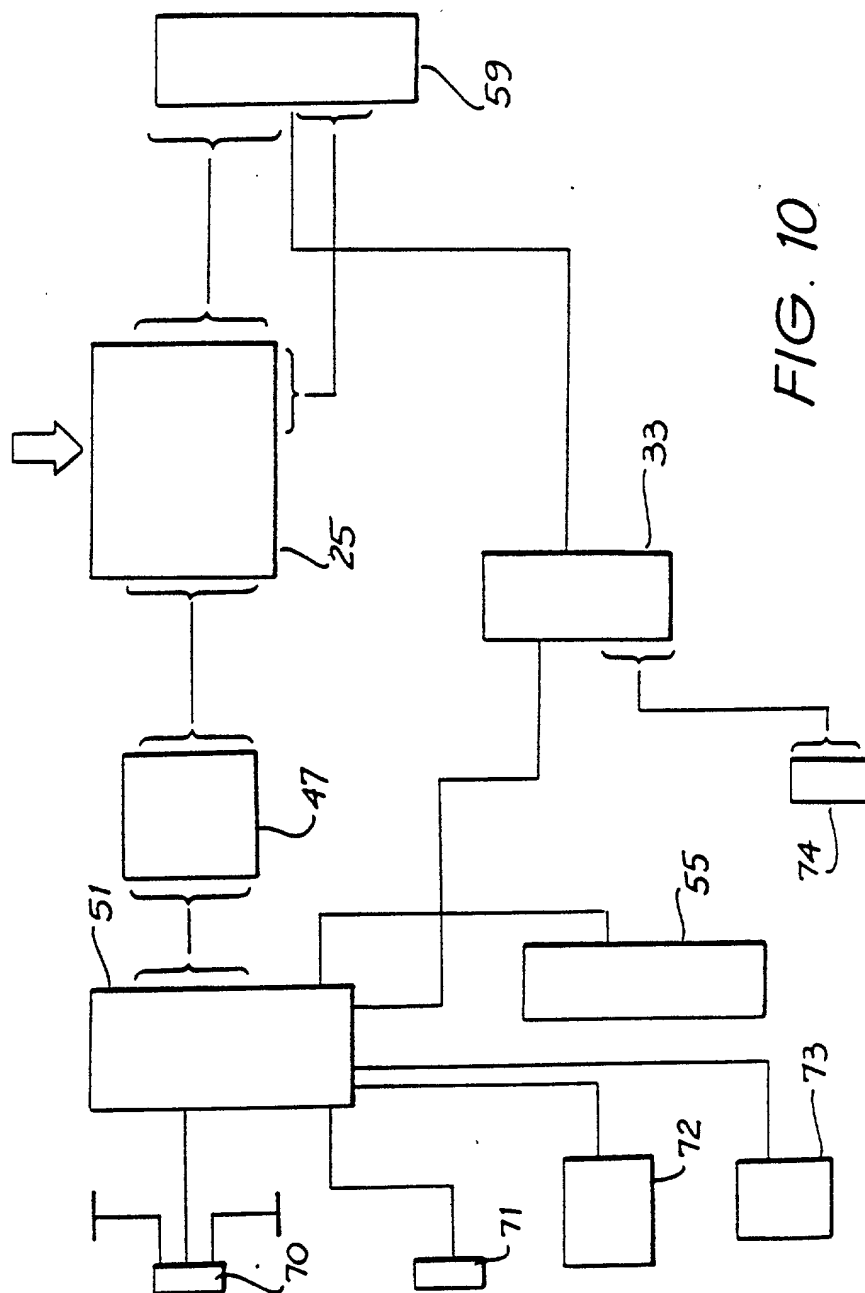


FIG. 10

## COMBINED DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name; and

I verily believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: **DISTRIBUTED DATABASE SYSTEM AND DATABASE RECEIVER THEREFOR** the specification of which:

( ) is attached hereto.

(XX) was filed on November 26, 1993 as International Application Serial No. PCT/AU93/00607.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information known to be material to the patentability of this application in accordance with 37 CFR § 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of any application on which priority is claimed:

Country	Number	Date Filed	Priority Claimed
Australia	PL 6080	November 27, 1992	Yes
Australia	PM 0549	August 13, 1993	Yes
Australia	PM 0742	August 20, 1993	Yes
Australia	PM 1570	September 30, 1993	Yes
Australia	PM 1571	September 30, 1993	Yes
Australia	PM 1621	October 1, 1993	Yes

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information known to be material to patentability as defined in 37 CFR § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

Application Serial No.	Filing Date	Status (patented, pending)
_____	_____	_____
_____	_____	_____
_____	_____	_____

I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith: **Steven J. Rocci and Michael D. Stein**, Registration Nos. 30,489 and 34,734 of the firm of **WOODCOCK WASHBURN KURTZ MACKIEWICZ & NORRIS**, One Liberty Place - 46th Floor, Philadelphia, Pennsylvania 19103, and

Address all telephone calls and correspondence to:

**Michael D. Stein**  
**WOODCOCK WASHBURN KURTZ MACKIEWICZ & NORRIS**  
One Liberty Place - 46th Floor  
Philadelphia, PA 19103  
Telephone No. 215-568-3100.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the

United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

1	Full Name: Thomas Andrew COHEN	Inventor's Signature <i>Thomas Andrew Cohen</i>	Date 12.6.95
	Residence: 33 Salvado Street, Cottesloe, Western Australia, 6011, Australia		Citizenship: Australia
	Post Office Address: Same as above		
2	Full Name: Robert Jeffries CHATFIELD	Inventor's Signature <i>Robert Jeffries Chatfield</i>	Date 12.6.95
	Residence: 15 Rae Street, Leederville, Western Australia, 6007, Australia		Citizenship: Australia
	Post Office Address: Same as above		
3	Full Name	Inventor's Signature	Date
	Residence	Citizenship	
	Post Office Address		
4	Full Name	Inventor's Signature	Date
	Residence	Citizenship	
	Post Office Address		
5	Full Name	Inventor's Signature	Date
	Residence	Citizenship	
	Post Office Address		

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In Re Application of: )  
 )  
 Thomas Andrew Cohen, et al ) Examiner: C. Lewis  
 )  
 Application No.: 09/054,896 ) Group No.: 2771  
 )  
 Filed: April 3, 1998 )  
 )  
 For "Distributed Database System And )  
 Database Receiver Therefor" )

**POWER OF ATTORNEY BY ASSIGNEE OF ENTIRE INTEREST  
(REVOCATION OF PRIOR POWERS)**

TO: Assistant Commissioner for Patents  
 Washington, D.C. 20231

Dear Sir:

As Assignee of record of the entire interest of the above-identified Application, all Powers  
 Of Attorney previously given are hereby revoked and the following attorneys are hereby appointed  
 to prosecute and transact all business in the Patent and Trademark Office connected therewith:

Alan L. Barry	30,819	Michael D. Lake	33,727
Edward L. Bishop	39,110	Marc D. Machinger	P43,434
Daniel N. Christus	29,626	Monique A. Mornault	37,893
Robert W. Diehl	35,118	James P. Muraff	39,785
Joseph A. Fuchs	34,604	Nelson Nofre	42,938
Jeffrey R. Gargano	38,148	Paul J. Nykaza	38,984
Matthew J. Gryzlo	P43,648	Bradley F. Rademaker	35,331
Brent A. Hawkins	P44,146	Marina N. Saito	42,121
Richard C. Himmelhoch	35,544	Roger H. Stein	31,882
James J. Jagoda	33,250	Thomas K. Stone	32,130
Peter M. Klobuchar	P43,722	Robert E. Wagner	20,528
Linda A. Kuczma	30,861		

09/054,896-2771-0004

Send correspondence and direct telephone calls to:


Marina N. Saito  
WALLENSTEIN & WAGNER, LTD.  
311 South Wacker Drive  
53rd Floor  
Chicago, Illinois 60606-6622  
(312) 554-3300  
(312) 554-3301 (fax)

Ownership by the Assignee is established as follows:

- ☒ An Assignment from the Inventor(s) of the matter identified above, which was recorded in the U.S. Patent and Trademark Office starting at Reel No. 7891, Frame 0877.
- ☐ An Assignment document separately being submitted for the recordal herewith.

IO RESEARCH PTY LIMITED

Date: \* 13 JANUARY 1999


\*   
Name

\* DIRECTOR  
Title of person authorized to sign

654614



United States Patent & Trademark Office  
Office of Initial Patent Examination – Scanning Division

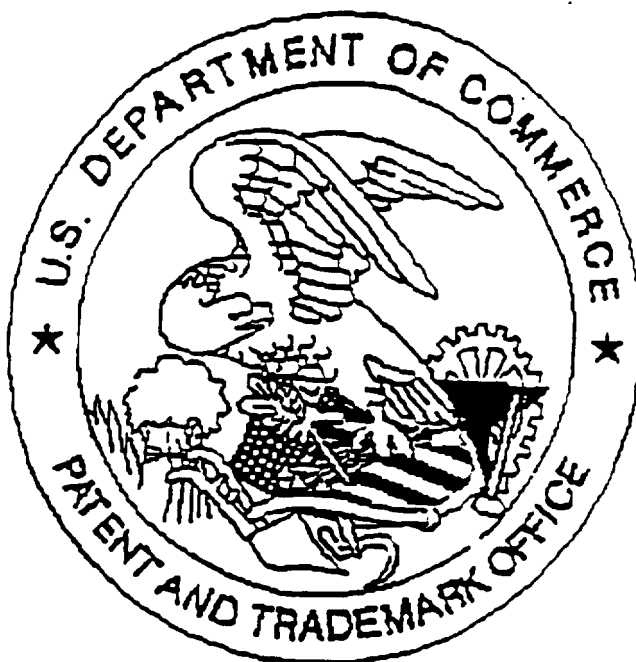

Application deficiencies were found during scanning:

☒ Page(s) 1 of Drawing were not present  
for scanning. (Document title)

☐ Page(s) \_\_\_\_\_ of \_\_\_\_\_ were not present  
for scanning. (Document title)

☐ Scanned copy is best available.